

Lift - Opening systems - Flap door



Lift - Opening systems
Flap door



Part number composition

F = Lifting system
R2 = Flap door opening
D/S = Right or left versions
XXXX = Special options
SN = Cover with Salice logo / **99** = Cover with arrangement for screw cover cap
X = Colour of the cover
X1 = Cover with silk-screen printed logo

FR2XXXXXSNX

D = right version
S = left version

G = grey cover
1 = white cover
9 = nickel-pl. cover



FR2XXXXX999


Part number for Lift system supplied with nickel-plated cover with arrangement for screw cover cap.

Screw cover cap to be ordered separately.



FR2XXXXX_9X1

Part number for Lift system supplied with nickel-plated cover with silk-screen printed logo.



Components of the system for wooden door




FR2DXXXXSNX
Lifting system - **right** side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 12 pcs.

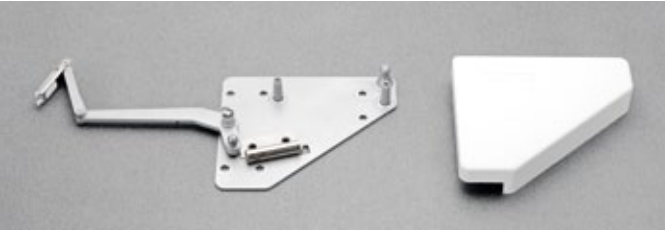

FR2SXXXXSNX
Lifting system - **left** side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 12 pcs.

To be ordered separately:

C2_6A99



Hinge for door.
See page 295 to complete the
part number with the available
fixing systems.

Packing
Boxes 300 pcs.

BAPGR39



Mounting plate for the top of the
wall cabinet.

Mounting plate for door.

Packing
Boxes 300 pcs.

FLMGSE **XXX** ← Fill with the required piston strength



Gas piston.
See page 300 and 302 to
complete the part number with
the appropriate piston strength.

Packing
Boxes 12 pcs.

D00SSNG



Smove

For doors of small weight and
dimensions.

Packing
Boxes 250 pcs.

FLMGRE **XXX** ← Fill with the required piston strength



Progressive gas piston.
See page 301 and 303 to
complete the part number with
the appropriate piston strength.

Packing
Boxes 12 pcs.

D00FSNG



Smove

For doors of middle weight and
dimensions.

Packing
Boxes 250 pcs.

D00LSNG



Smove

For doors of large weight and
dimensions.

Packing
Boxes 250 pcs.



Components of the system for alu-framed door




FR2DXXXXSNX
Lifting system - **right** side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 12 pcs.

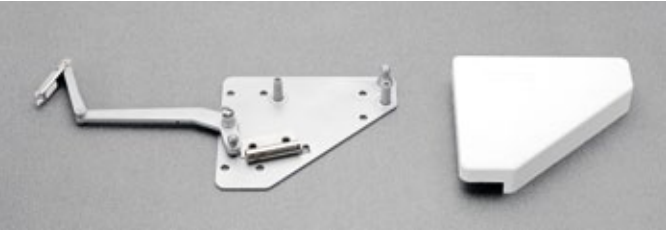

FR2SXXXXSNX
Lifting system - **left** side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 12 pcs.

To be ordered separately:

C2Z6A99



Hinge for door

Packing
Boxes 150 pcs.

BAP_R39



BAPGR39
Mounting plate for the top of
the wall cabinet.
BAP3R39
Mounting plate for door.

Packing
Boxes 300 pcs.

FLMGSE **XXX** ← Fill with the required piston strength



Gas piston.
See page 300 and 302 to
complete the part number with
the appropriate piston strength.

Packing
Boxes 12 pcs.

D00SSNG



Smove

For doors of small weight and
dimensions.

Packing
Boxes 250 pcs.

FLMGRE **XXX** ← Fill with the required piston strength



Progressive gas piston.
See page 301 and 303 to
complete the part number with
the appropriate piston strength.

Packing
Boxes 12 pcs.

D00FSNG



Smove

For doors of middle weight and
dimensions.

Packing
Boxes 250 pcs.

DLZX8H9



Support for plate with fixing
screws.

Packing
Boxes 150 pcs.

D00LSNG



Smove

For doors of large weight and
dimensions.

Packing
Boxes 250 pcs.



Components of the system for wooden door with Push opening




FR2DXXXXSNX
Lifting system - **right** side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 12 pcs.

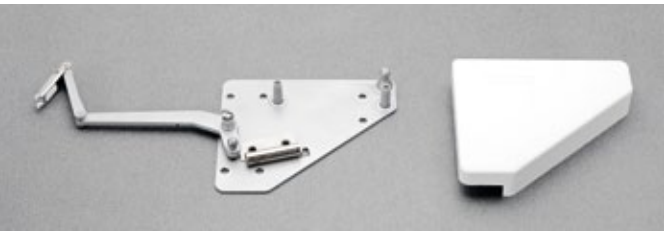

FR2SXXXXSNX
Lifting system - **left** side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 12 pcs.

To be ordered separately:

C2_PA99



Hinge for door.
See page 295 to complete the
part number with the available
fixing systems.

Packing
Boxes 300 pcs.

BAPGR39



Mounting plate for the top of the
wall cabinet.
Mounting plate for door.

Packing
Boxes 300 pcs.

FLMGSE XXX ← Fill with the required piston strength



Gas piston.
See page 300 and 302 to
complete the part number with
the appropriate piston strength.

Packing
Boxes 12 pcs.

D00PSNA



Smove

Packing
Boxes 250 pcs.

FLMGRE XXX ← Fill with the required piston strength



Progressive gas piston.
See page 301 and 303 to
complete the part number with
the appropriate piston strength.

Packing
Boxes 12 pcs.



Components of the system for alu-framed door with Push opening




FR2DXXXXSNX
Lifting system - **right** side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 12 pcs.

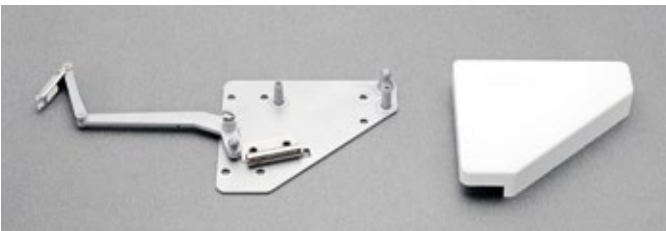

FR2SXXXXSNX
Lifting system - **left** side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 12 pcs.

To be ordered separately:

C2ZPA99



Hinge for door.

Packing
Boxes 150 pcs.

BAP_R39



BAPGR39
Mounting plate for the top of
the wall cabinet.
BAP3R29
Mounting plate for door.

Packing
Boxes 300 pcs.

FLMGSE XXX ← Fill with the required piston strength



Gas piston.
See page 300 and 302 to
complete the part number with
the appropriate piston strength.

Packing
Boxes 12 pcs.

D00PSNA



Smove

Packing
Boxes 250 pcs.

FLMGRE XXX ← Fill with the required piston strength



Progressive gas piston.
See page 301 and 303 to
complete the part number with
the appropriate piston strength.

Packing
Boxes 12 pcs.

DLZX8H9



Support for plate with fixing
screws.


Packing
Boxes 150 pcs.



The door can be opened with or without a handle. If a handle is used, it can be positioned anywhere on the door. Alternatively, for doors up to 400 mm in height that are not fitted with a handle for aesthetic reasons, the Push self-opening system can be used.




Push with depth and sideways adjustment

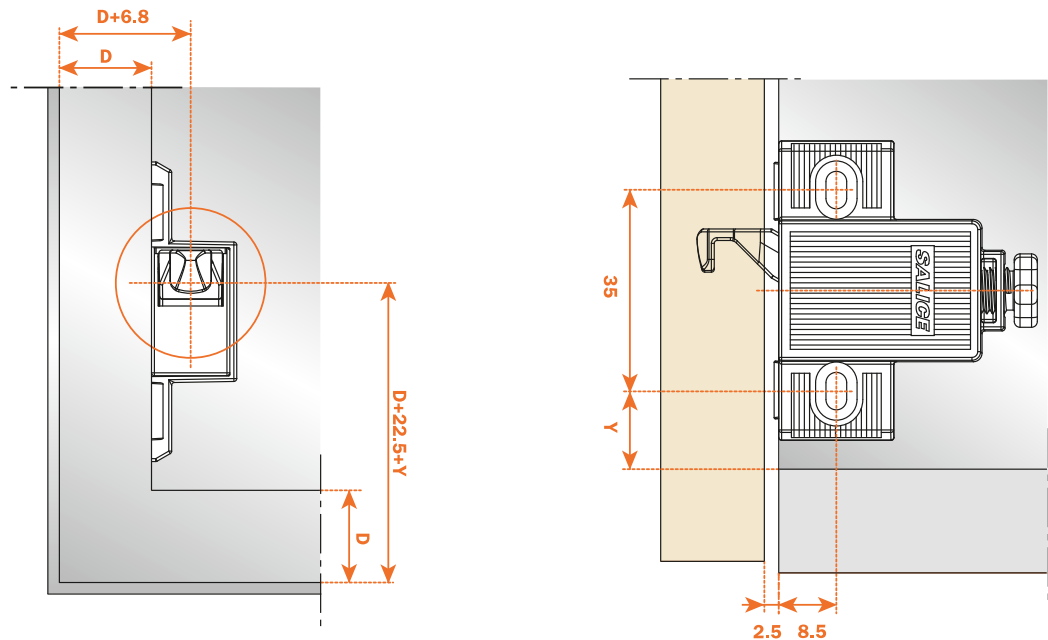


D = Door overlay on side and base panel of the cabinet
Y = min. 8.5 mm

Push without adjustment

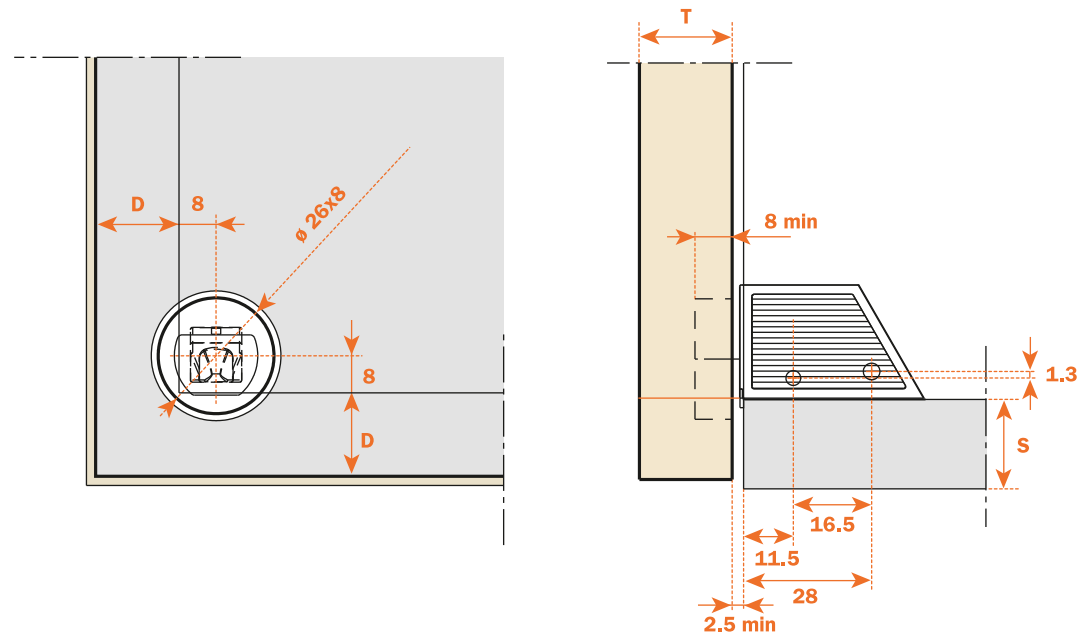


D = Door overlay on side and base panel of the cabinet
Drilling distance of retaining catch = D + 8

Fixing the support to the cabinet side

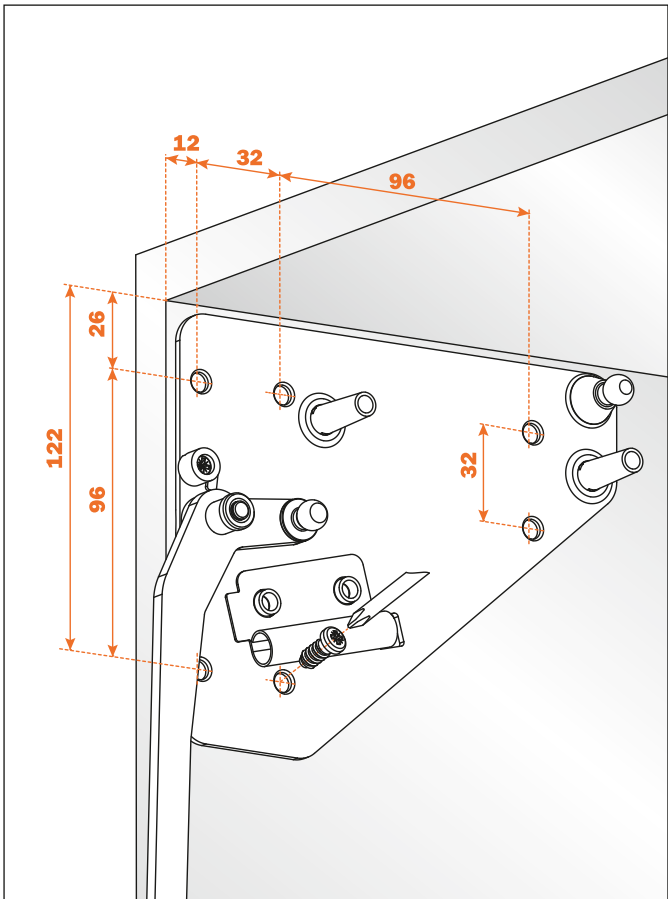

Deploying the piston

Carefully press each end of the piston securely onto the pins on the bracket and lifting arm, ensuring that the body of the piston is uppermost.

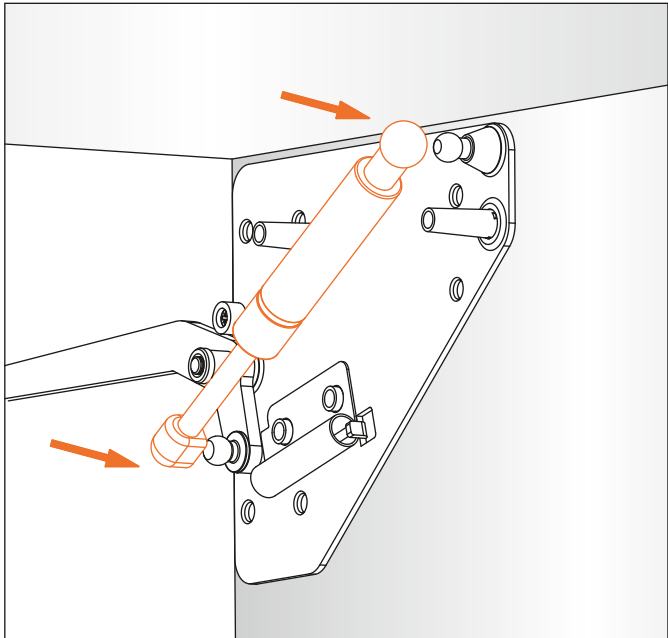


Drilling pattern for wooden door

Available fixing systems for the hinge cup:

- A** = wood screw fixing, 48x6 mm drilling
- P** = wood screw fixing, 45x9.5 mm drilling
- U** = wood screw fixing, 52x5.5 mm drilling
- B** = dowel fixing, 48x6 mm drilling
- R** = dowel fixing, 45x9.5 mm drilling
- W** = dowel fixing, 52x5.5 mm drilling
- 6** = Rapido fixing, 48x6 mm drilling
- 7** = Rapido fixing, 45x9.5 mm drilling
- 2** = Rapido fixing, 52x5.5 mm drilling


D = sideways and upper overlay

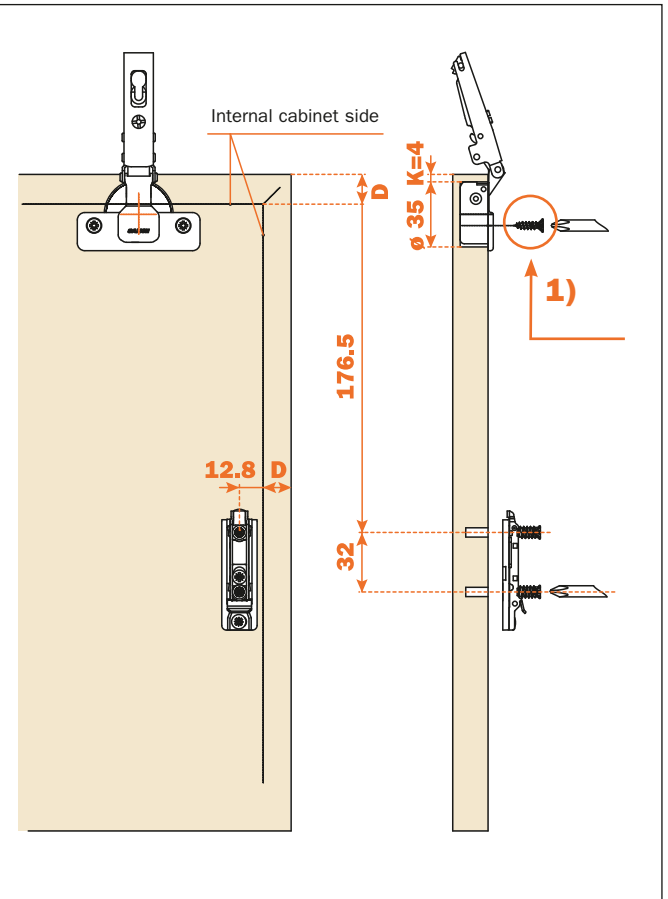

Drilling pattern for alu-framed door - width min. 17 mm, max. 24 mm

For alu-framed door, fix the mounting plate to the appropriate adapter.


D = sideways and upper overlay

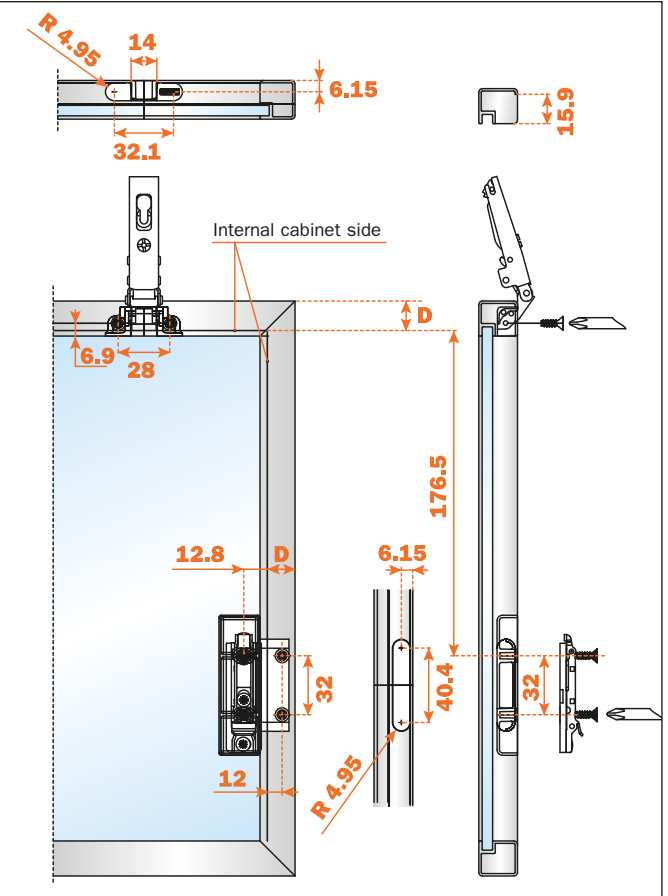


Drilling pattern for alu-framed door - width min. 45 mm

Available fixing system for the hinge cup:


- A = wood screw fixing, 48x6 mm drilling
 - P = wood screw fixing, 45x9.5 mm drilling
 - U = woodscrew fixing, 52x5.5 mm drilling
- D = sideways and upper overlay

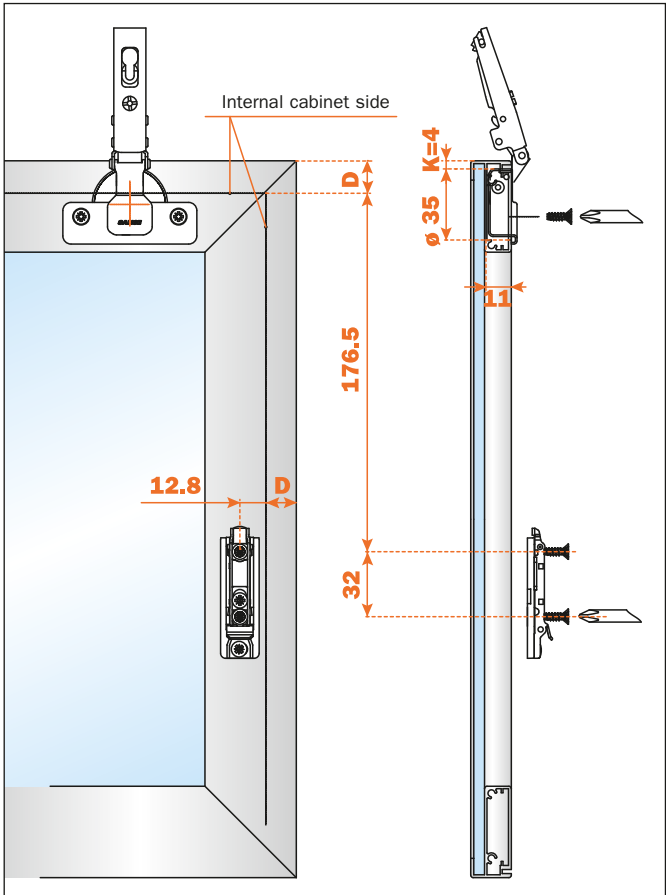


Fitting the door to the cabinet

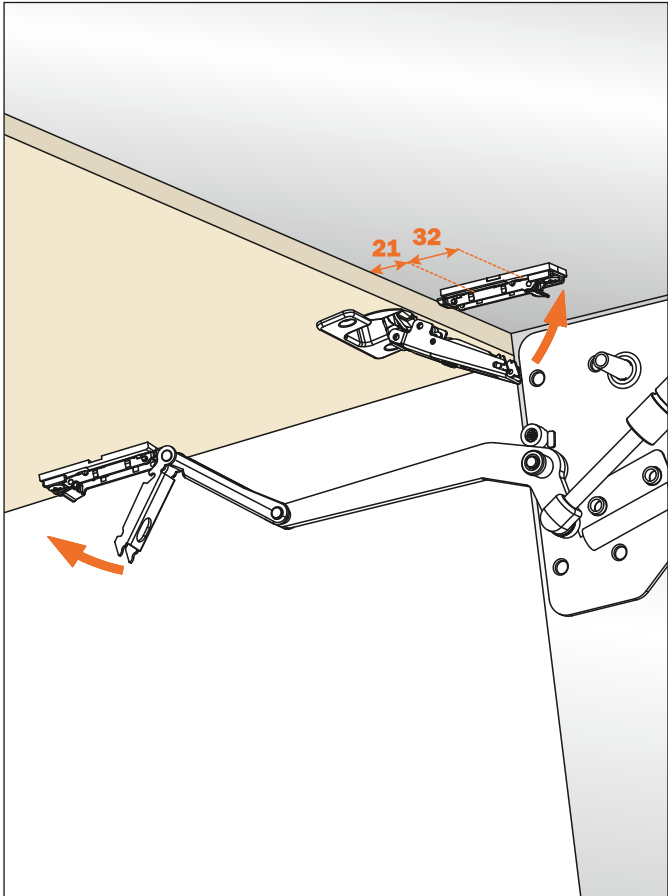


Installing the Smove

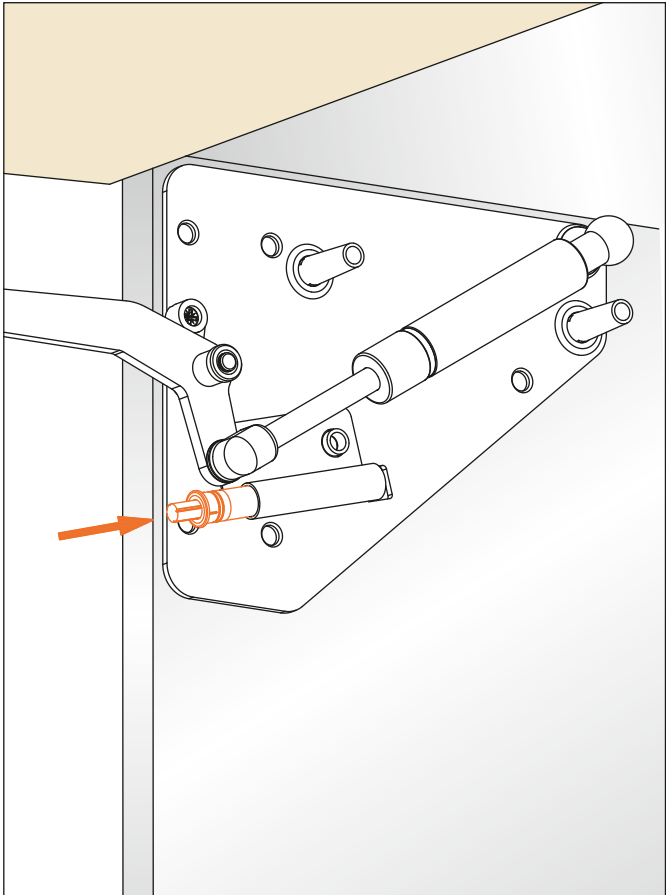


Adjustment of the opening angle of the door by cam

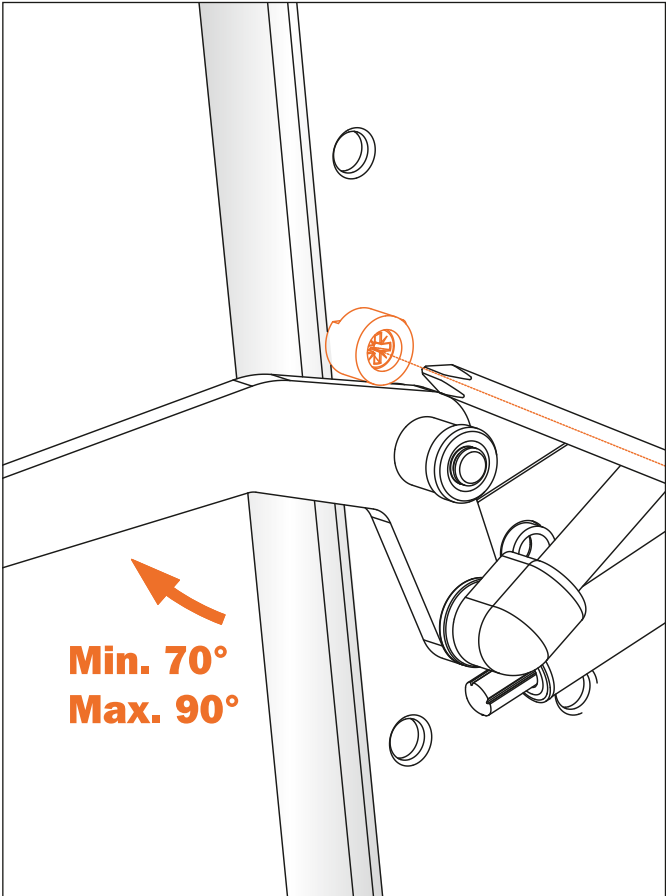

Installing the cover

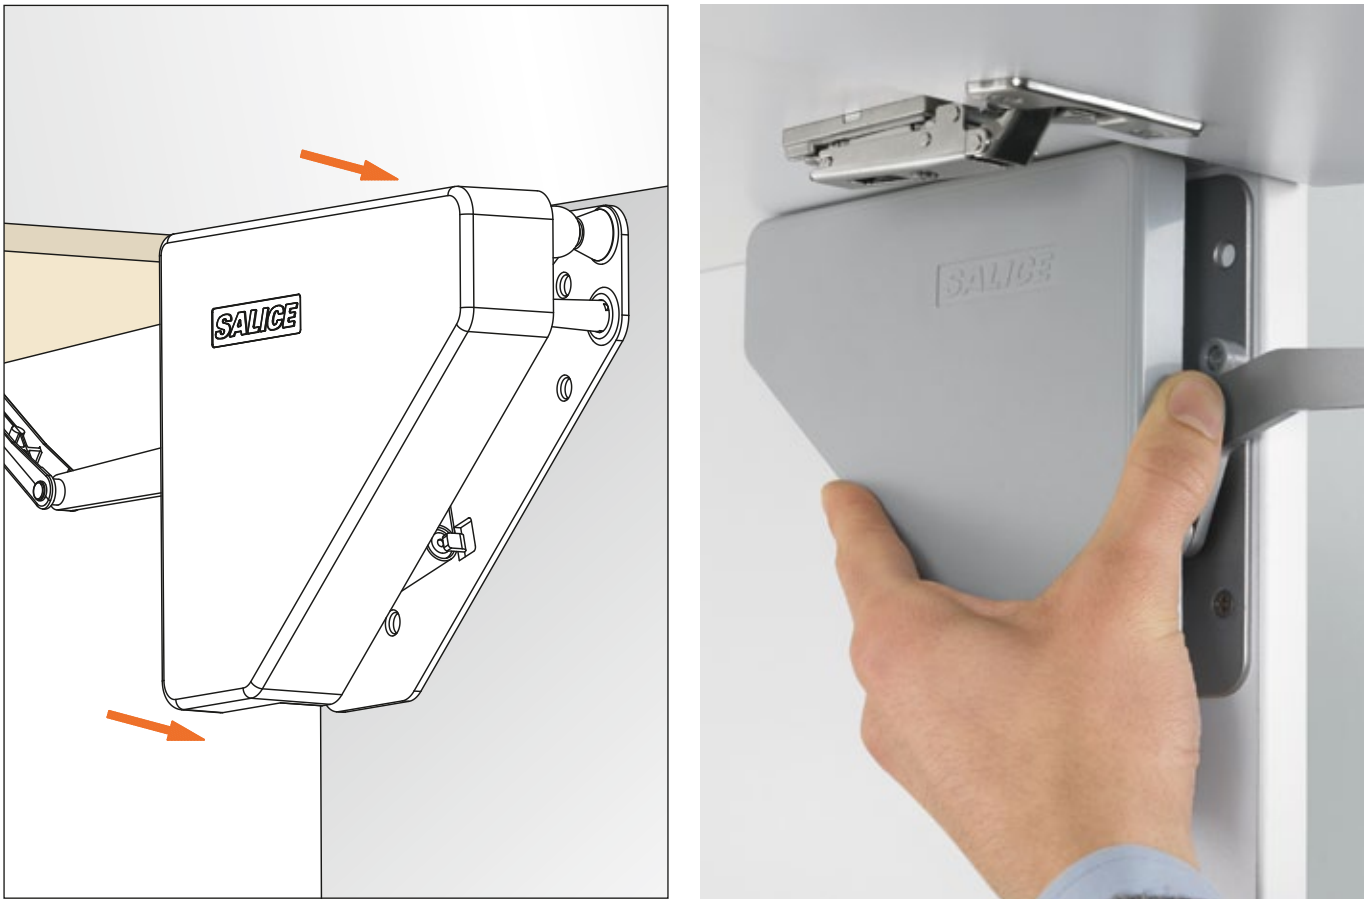

Disassembly

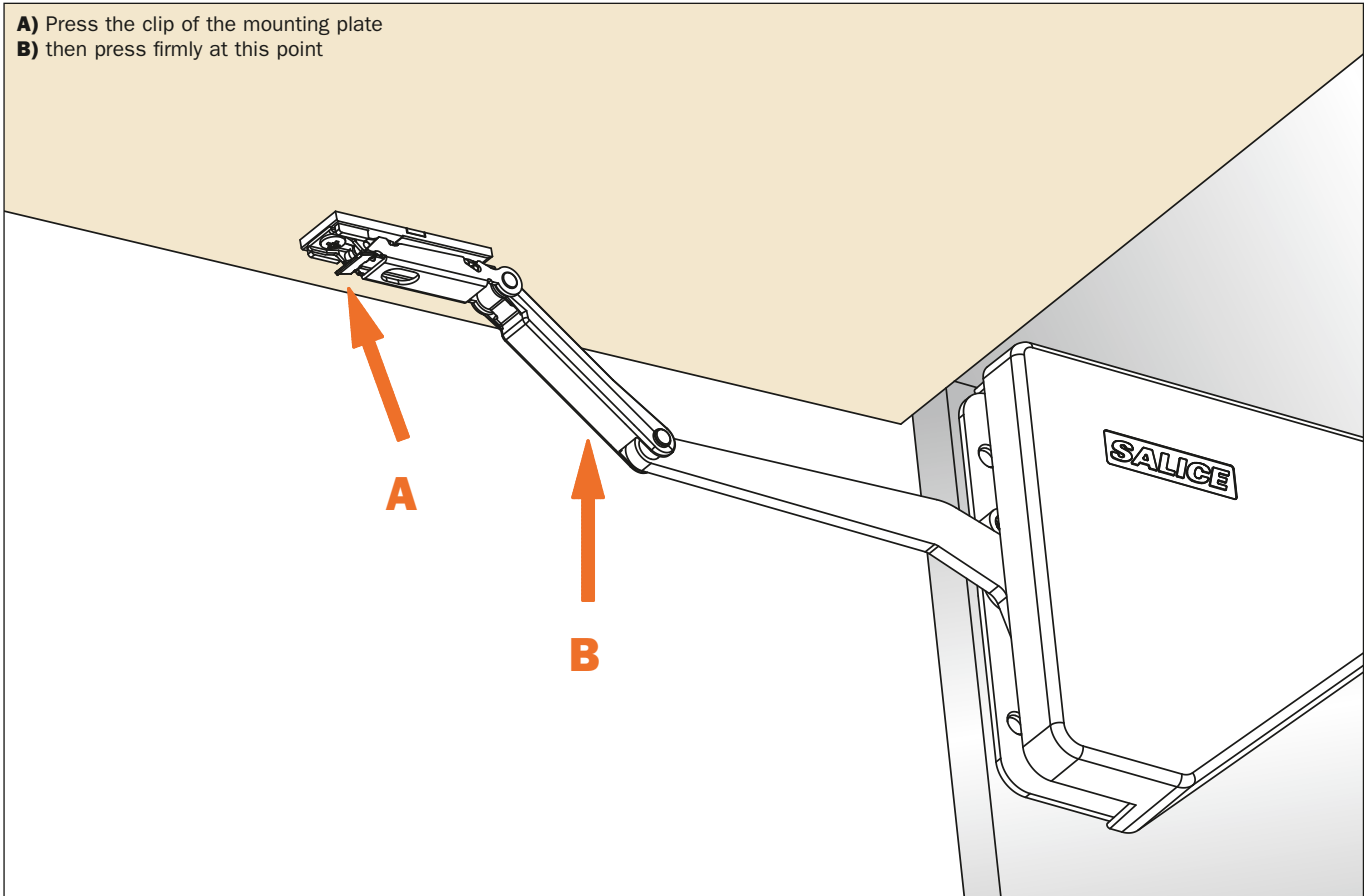

Dimensions of the system

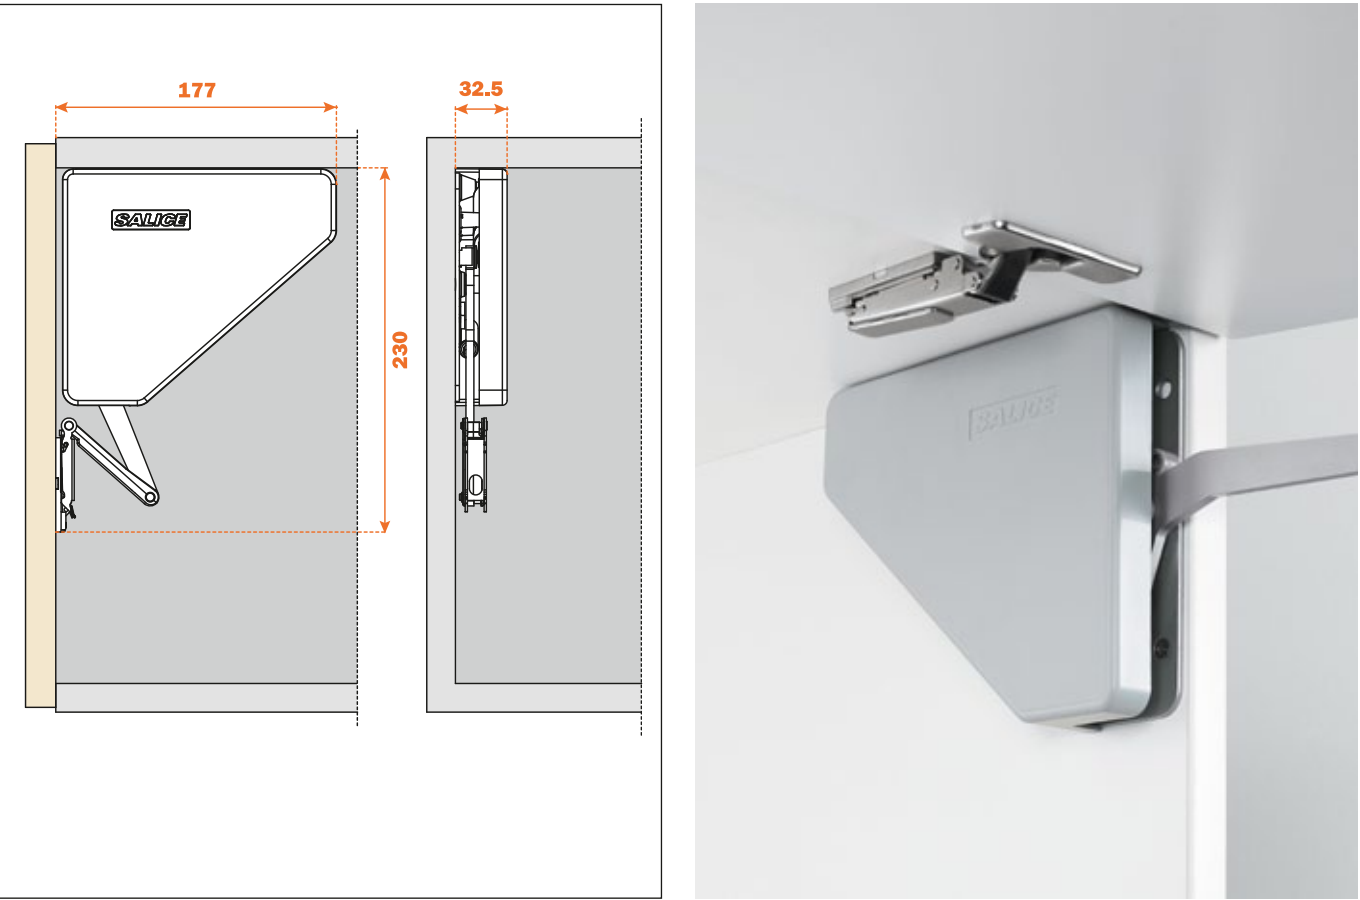


Chart for FLMGSExxx pistons with single-operation door opening (systems with one piston)

Chart to define the exact strength (N) of the pistons to be used in relationship with the dimensions and weight of the doors.
It is suggested that some assembly trials are made.
Our technical Assistance Service is at your disposal for any additional information.

Cabinet width 600, 900 and 1200 mm






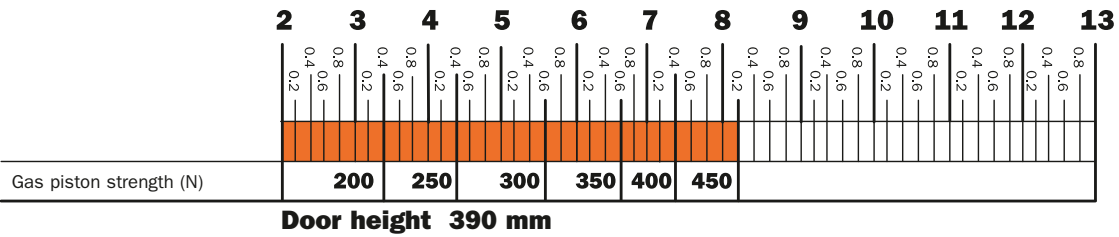


Chart for FLMGSExxx pistons with single-operation door opening (systems with two pistons)

Chart to define the exact strength (N) of the pistons to be used in relationship with the dimensions and weight of the doors.
It is suggested that some assembly trials are made.
Our technical Assistance Service is at your disposal for any additional information.

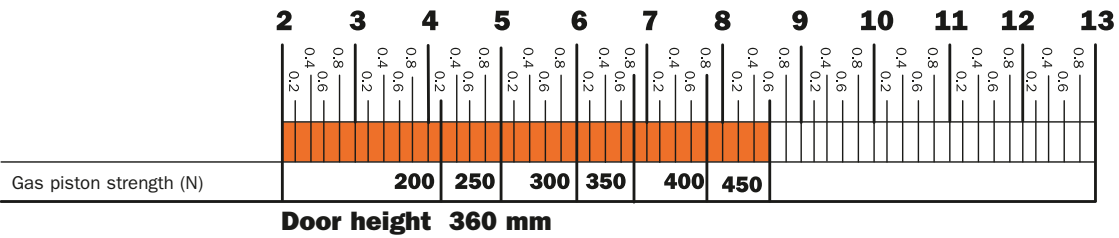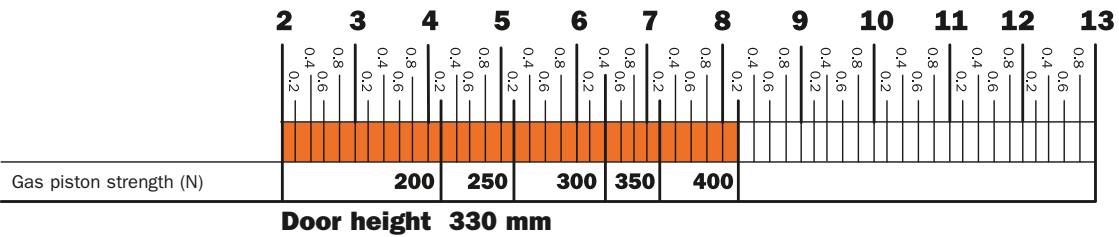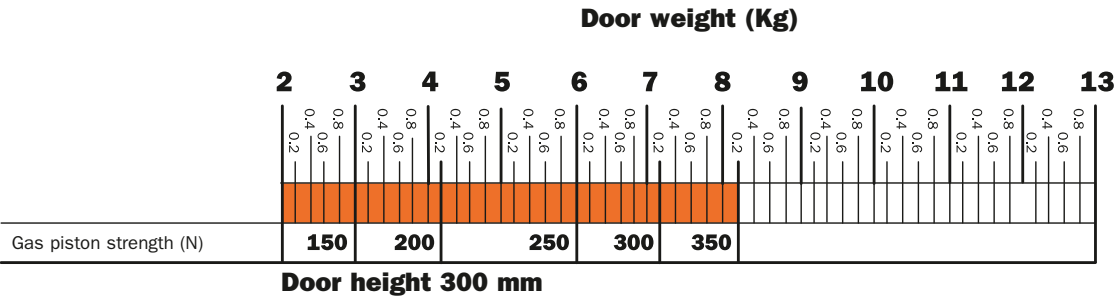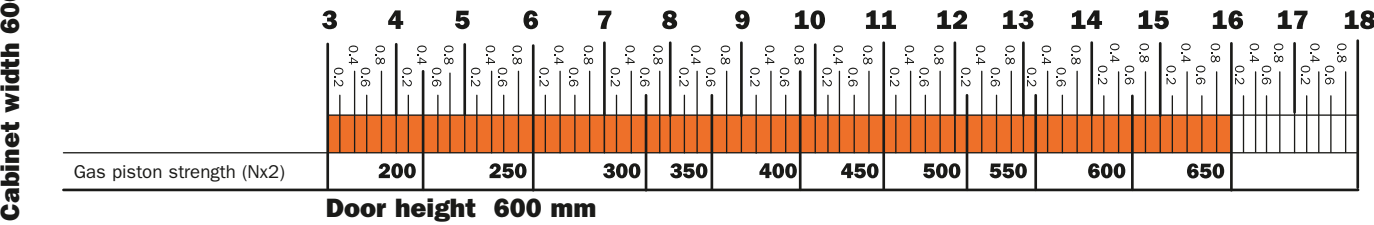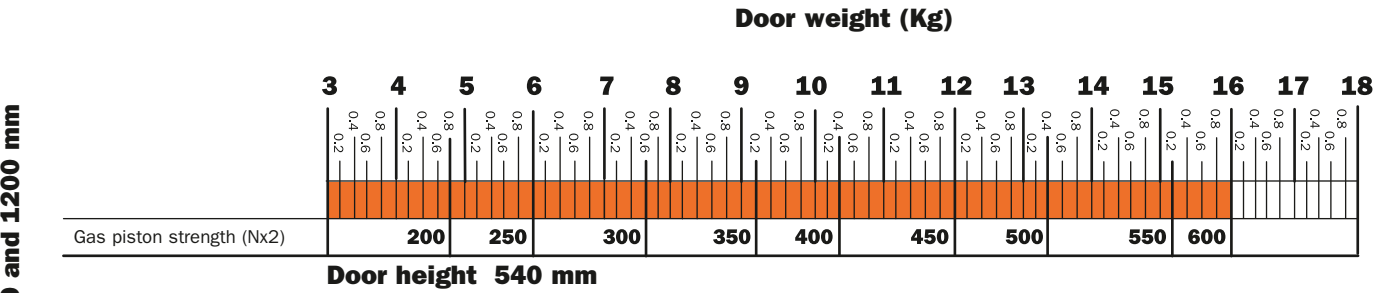

Cabinet width 600, 900 and 1200 mm

Chart for FLMGRExxx piston with progressive-operation door opening (systems with one piston)

Chart to define the exact strength (N) of the pistons to be used in relationship with the dimensions and weight of the doors.
It is suggested that some assembly trials are made. Our technical Assistance Service is at your disposal for any additional information.


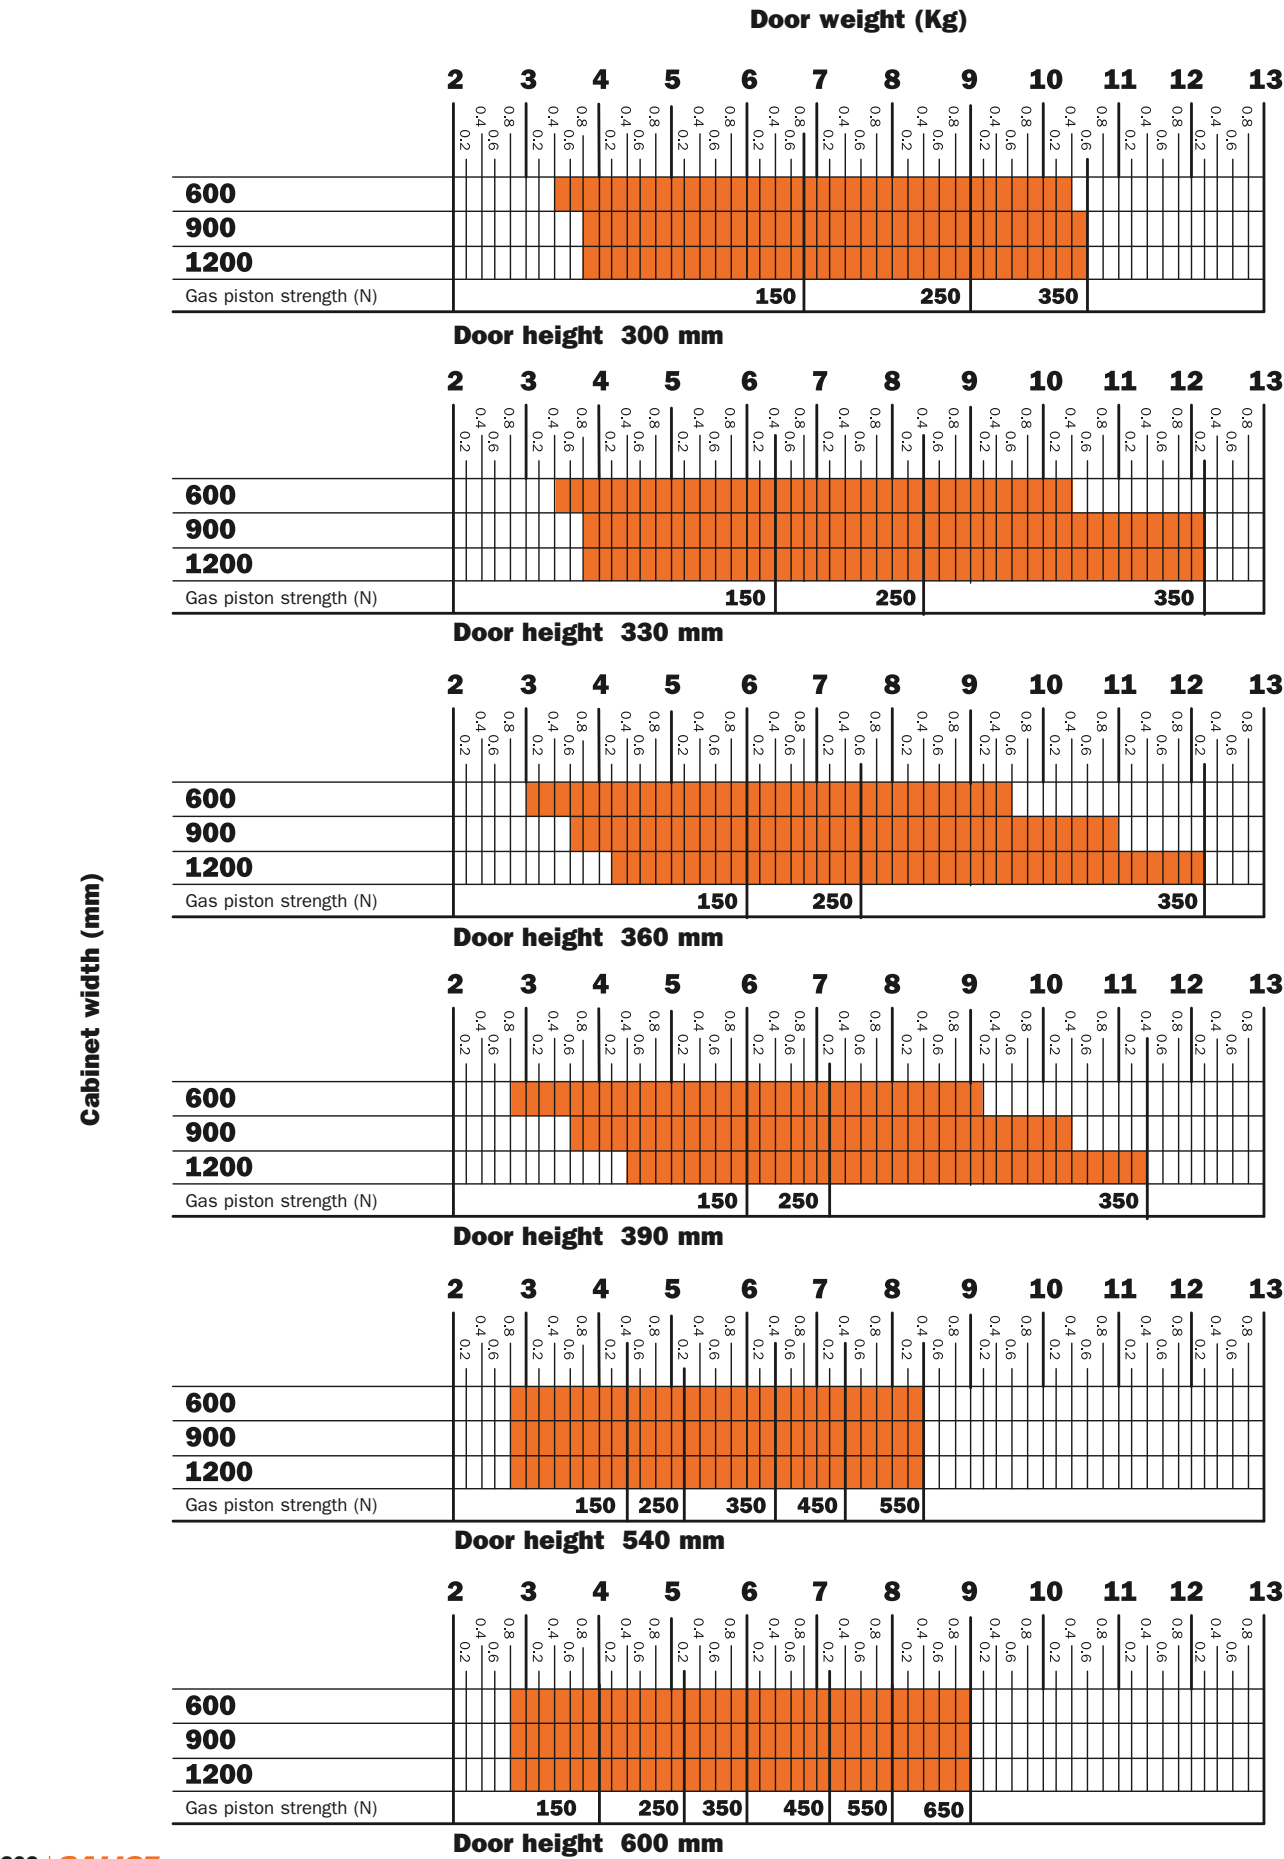


Chart for FLMGRExxx piston with progressive-operation door opening (system with two pistons)

Chart to define the exact strength (N) of the pistons to be used in relationship with the dimensions and weight of the doors.
It is suggested that some assembly trials are made.
Our technical Assistance Service is at your disposal for any additional information.



Lift - Opening systems - Folding door

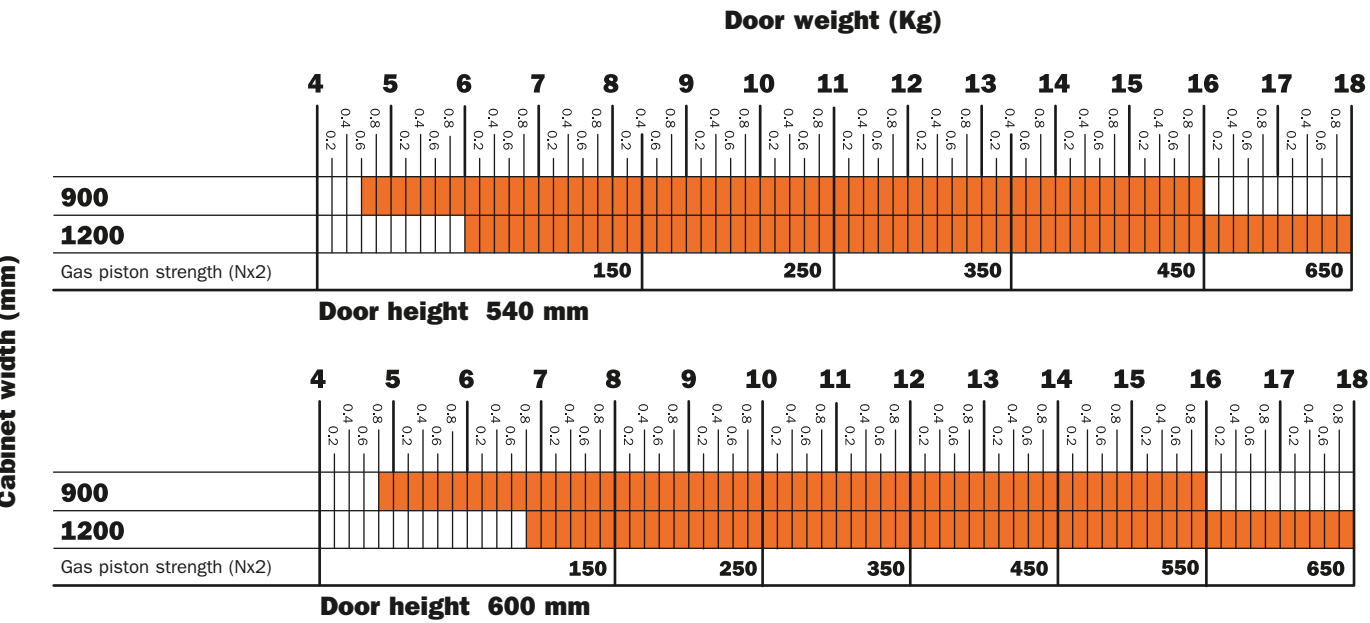


Lift - Opening systems
Folding door



Part number composition

- F = Lifting system
- L1 = Folding door opening
- D/S = Right or left versions
- LL = Cabinet height
- XX = Special options
- SN = Cover with Salice logo / 99 = Cover with arrangement for screw cover cap
- X = Colour of the cover
- X1 = Cover with silk-screen printed logo

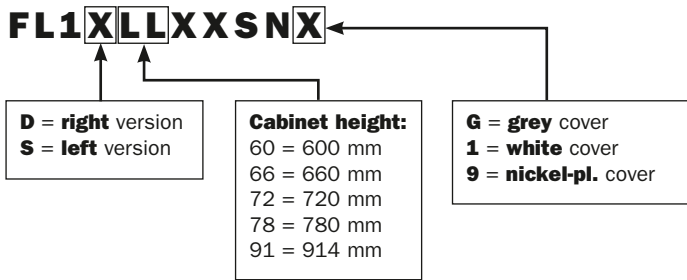

FL1XLLXX999

Part number for Lift system supplied with nickel-plated cover with arrangement for screw cover cap.

Screw cover cap to be ordered separately.



FL1XLLXX_9X1

Part number for Lift system supplied with nickel-plated cover with silk-screen printed logo.



Components of the system for wooden doors




FL1DLLXXSNX

Lifting system - right side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 12 pcs.

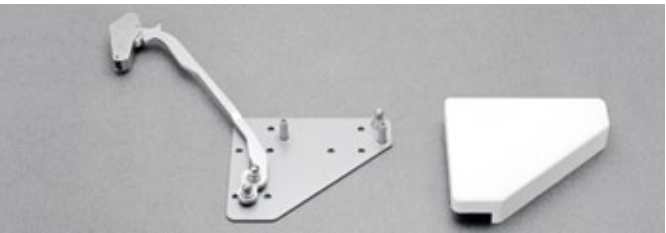

FL1SLLXXSNX

Lifting system - left side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 12 pcs.

To be ordered separately:

C2_6A99



Hinge for door.
See page 312 to complete the part number with the available fixing systems.

Packing
Boxes 300 pcs.

BAPGR39



Mounting plate for the top of the wall cabinet.
Mounting plate for door.

Packing
Boxes 300 pcs.

FLMGSE XXX ← Fill with the required piston strength



Gas piston.
See page 318 to complete the part number with the appropriate piston strength.

Packing
Boxes 12 pcs.

D00SSNG



Smove
For doors of small weight and dimensions.

Packing
Boxes 250 pcs.

FLMGRE XXX ← Fill with the required piston strength



Progressive gas piston.
See page 319 to complete the part number with the appropriate piston strength.

Packing
Boxes 12 pcs.

D00FSNG



Smove
For doors of middle weight and dimensions.

Packing
Boxes 250 pcs.

FLC_E9



Central hinge.
See page 314 to complete the part number with the available fixing systems.

Packing
Boxes 150 pcs.

D00LSNG



Smove
For doors of large weight and dimensions.

Packing
Boxes 250 pcs.

FLC_E9R



Central hinge with height and sideways adjustment ±1.5 mm.
See page 314 to complete the part number with the available fixing systems.

Packing
Boxes 150 pcs.

Lift - Opening systems - Folding door



Components of the system
Upper wooden door - lower alu-framed door




FL1DLLXXSNX
Lifting system - **right** side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 12 pcs.

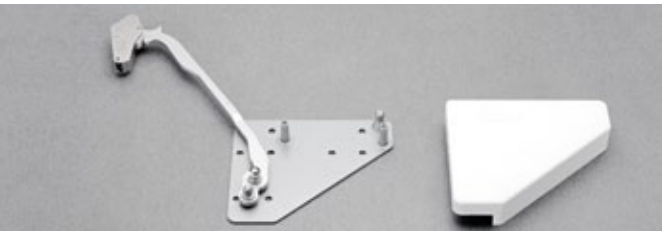

FL1SLXXSNX
Lifting system - **left** side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 12 pcs.

To be ordered separately:

C2_6A99



Hinge for door.
See page 312 to complete the part number with the available fixing systems.

Packing
Boxes 300 pcs.

BAP_R39



BAPGR39
Mounting plate for the top of the wall cabinet

BAP3R29
Mounting plate for door

Packing
Boxes 300 pcs.

FLMGSE XXX ← Fill with the required piston strength



Gas piston.
See page 318 to complete the part number with the appropriate piston strength.

Packing
Boxes 12 pcs.

D00SSNG



Smove
For doors of small weight and dimensions.

Packing
Boxes 250 pcs.

FLMGRE XXX ← Fill with the required piston strength



Progressive gas piston.
See page 319 to complete the part number with the appropriate piston strength.

Packing
Boxes 12 pcs.

D00FSNG



Smove
For doors of middle weight and dimensions.

Packing
Boxes 250 pcs.

FLV_E9R



Central hinge with height and sideways adjustment ± 1.5 mm.
See page 314 and 316 to complete the part number with the available fixing systems.

Packing
Boxes 150 pcs.

D00LSNG



Smove
For doors of large weight and dimensions.

Packing
Boxes 250 pcs.

FLV_E9



Central hinge.
See page 314 and 316 to complete the part number with the available fixing systems.


Packing
Boxes 150 pcs.

DLZXBH9



Support for plate with fixing screws.

Packing
Boxes 150 pcs.



Components of the system
Upper alu-framed door - lower wooden door



FL1DLLXXSNX
Lifting system - **right** side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 12 pcs.



FL1SLXXSNX
Lifting system - **left** side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 12 pcs.

To be ordered separately:

C2Z6A99



Hinge for door

Packing
Boxes 150 pcs.

BAPGR39



Mounting plate for the top of the wall cabinet.
Mounting plate for door.

Packing
Boxes 300 pcs.

FLMGSE XXX ← Fill with the required piston strength



Gas piston.
See page 318 to complete the part number with the appropriate piston strength.

Packing
Boxes 12 pcs.

D00SSNG



Smove
For doors of small weight and dimensions.

Packing
Boxes 250 pcs.

FLMGRE XXX ← Fill with the required piston strength



Progressive gas piston.
See page 319 to complete the part number with the appropriate piston strength.

Packing
Boxes 12 pcs.

D00FSNG



Smove
For doors of middle weight and dimensions.

Packing
Boxes 250 pcs.

FLW_E9



Central hinge.
See page 314 and 316 to complete the part number with the available fixing systems.


Packing
Boxes 150 pcs.

D00LSNG



Smove
For doors of large weight and dimensions.

Packing
Boxes 250 pcs.



Components of the system for alu-framed doors



FL1DLLXXSNX
Lifting system - **right** side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 12 pcs.



FL1SLXSNX
Lifting system - **left** side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 12 pcs.

To be ordered separately:

C2Z6A99

Hinge for door



Packing
Boxes 150 pcs.

BAP_R39



BAPGR39
Mounting plate for the top
of the wall cabinet.

BAP3R29
Mounting plate for door

Packing
Boxes 300 pcs.

FLMGSE XXX ← Fill with the required piston strength



Gas piston.
See page 318 to complete
the part number with the
appropriate piston strength.

Packing
Boxes 12 pcs.

D00SSNG



Smove
For doors of small weight and
dimensions.

Packing
Boxes 250 pcs.

FLMGRE XXX ← Fill with the required piston strength



Progressive gas piston.
See page 319 to complete
the part number with the
appropriate piston strength.

Packing
Boxes 12 pcs.

D00FSNG



Smove
For doors of middle weight and
dimensions.

Packing
Boxes 250 pcs.

DLZX8H9

Support for plate with fixing
screws.



Packing
Boxes 150 pcs.

D00LSNG



Smove
For doors of large weight and
dimensions.

Packing
Boxes 250 pcs.


FLZXE9

Central hinge.




Packing
Boxes 150 pcs.

Fixing the support to the cabinet side

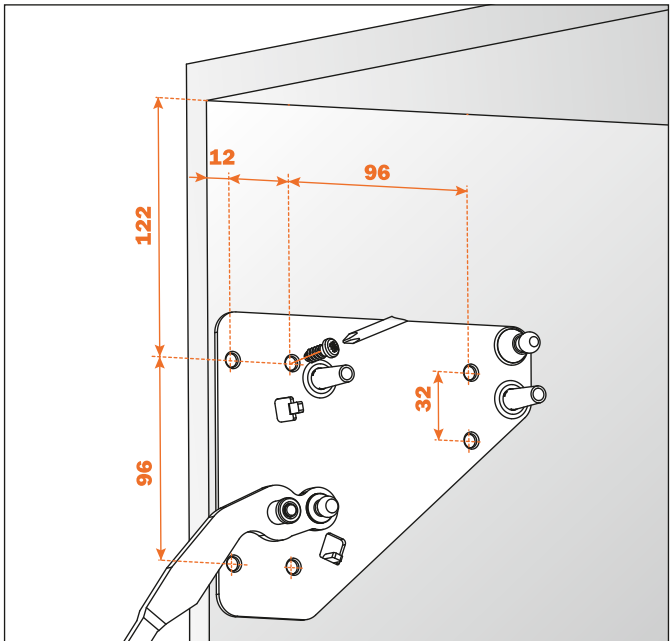

Deploying the piston


Carefully press each end of the piston securely onto the pins
on the bracket and lifting arm, ensuring that the body of the piston
is uppermost.

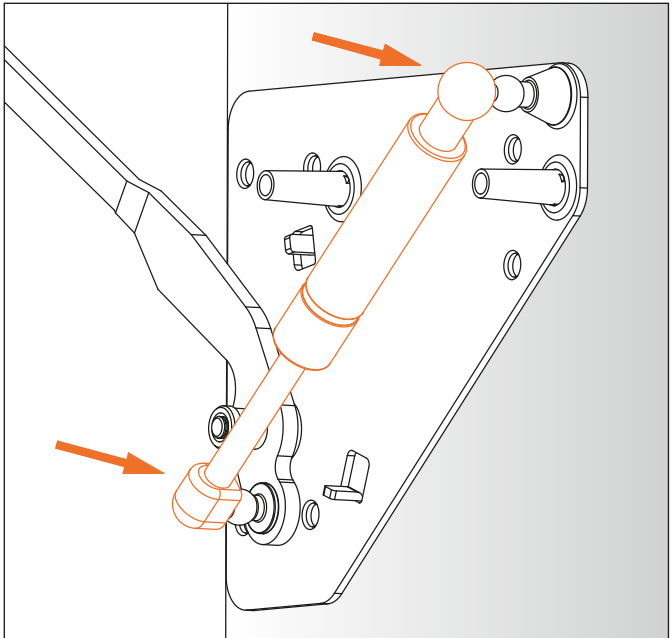

Installing the Smove

We suggest:




DOOFSNG for doors up to 6 kg
DOOLSNNG for doors over 6 kg

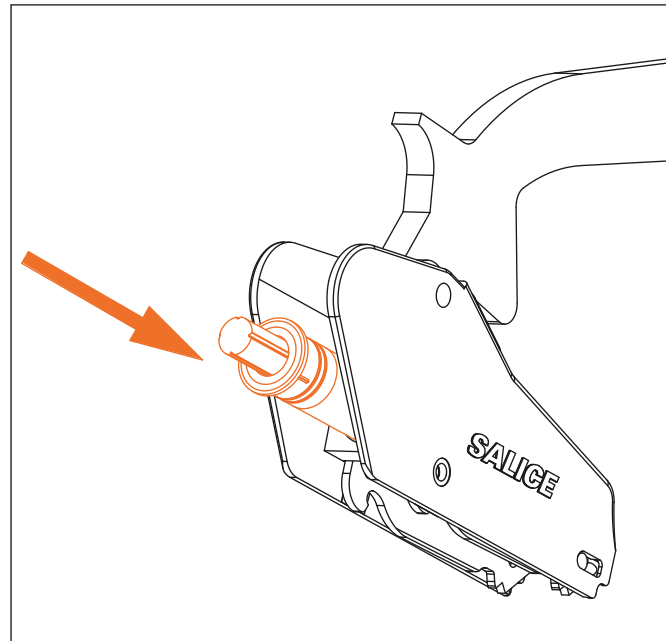




Drilling pattern for the upper wooden door

Available fixing systems for the hinge cup:

A = wood screw fixing, 48x6 mm drilling
P = wood screw fixing, 45x9.5 mm drilling
U = wood screw fixing, 52x5.5 mm drilling
B = dowel fixing, 48x6 mm drilling
R = dowel fixing, 45x9.5 mm drilling
W = dowel fixing, 52x5.5 mm drilling
6 = Rapido fixing, 48x6 mm drilling
7 = Rapido fixing, 45x9.5 mm drilling
2 = Rapido fixing, 52x5.5 mm drilling

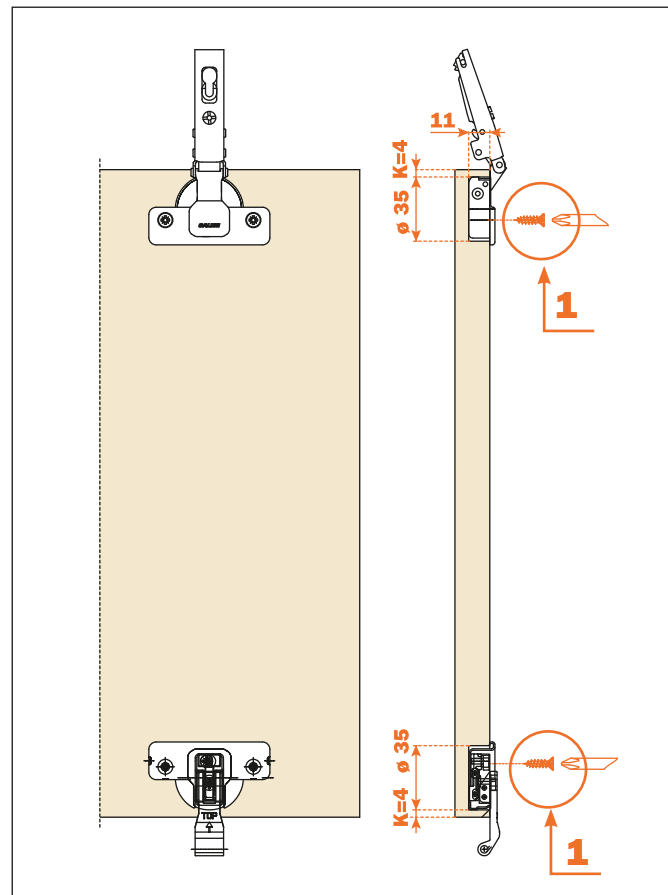




Drilling pattern for the upper alu-framed door - width min. 17 mm, max. 24 mm

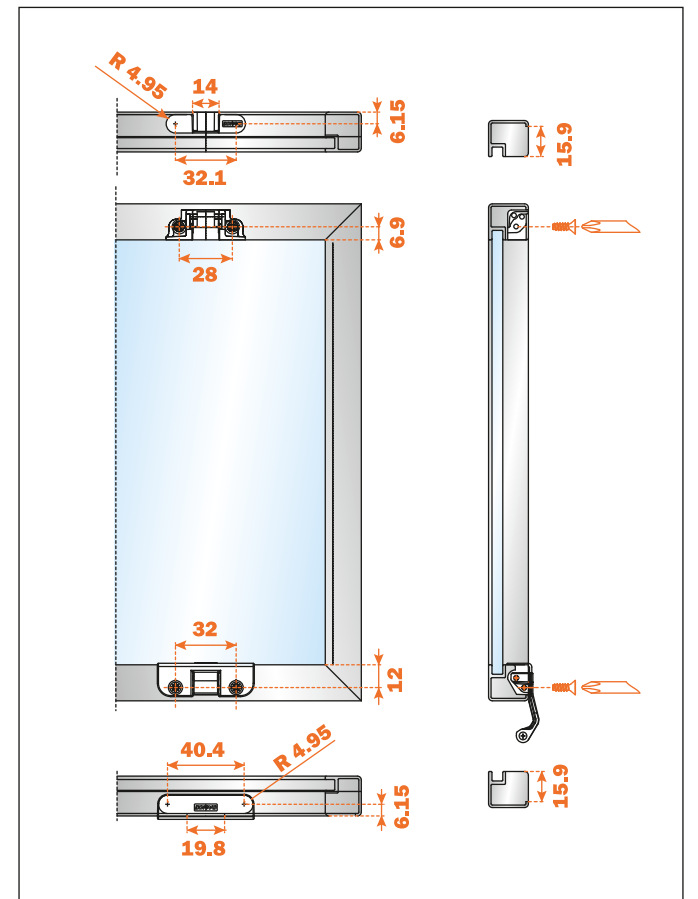

Drilling pattern for the upper alu-framed door - width min. 45 mm

Available fixing systems for the hinge cup:

A = woodscrew fixing, 48x6 mm drilling
P = woodscrew fixing, 45x9.5 mm drilling
U = woodscrew fixing, 52x5.5 mm drilling

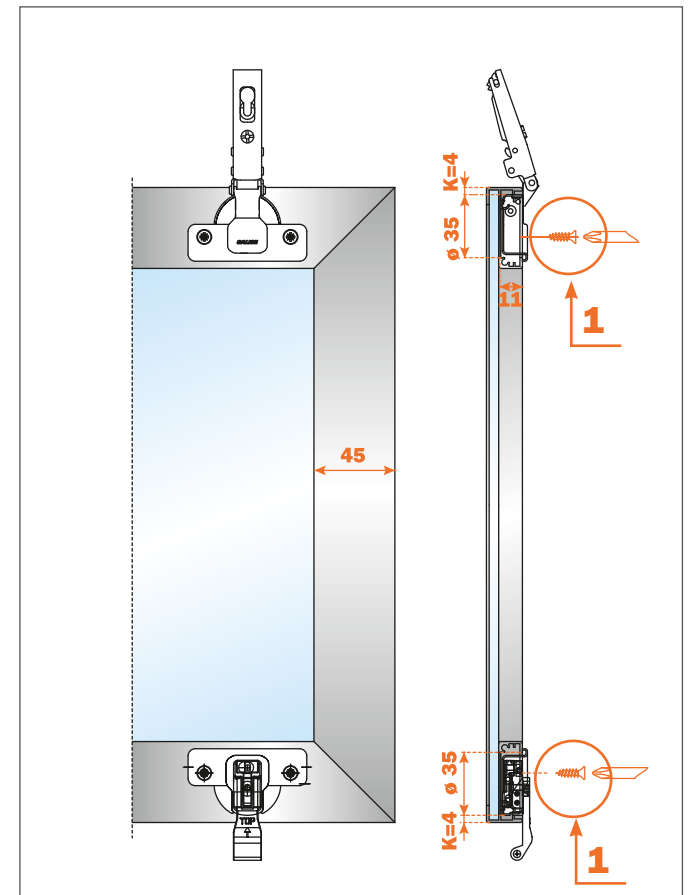



Drilling pattern for the lower wooden door

Available fixing systems for the hinge cup:

A = wood screw fixing, 48x6 mm drilling
P = wood screw fixing, 45x9.5 mm drilling
U = wood screw fixing, 52x5.5 mm drilling
B = dowel fixing, 48x6 mm drilling
R = dowel fixing, 45x9.5 mm drilling
W = dowel fixing, 52x5.5 mm drilling
6 = Rapido fixing, 48x6 mm drilling
7 = Rapido fixing, 45x9.5 mm drilling
2 = Rapido fixing, 52x5.5 mm drilling

D = sideways overlay

* Dimension is valid for cabinet heights 600, 660, 720 and 780 mm.
For cabinets of different heights, please consult Salice customer service for the correct value.

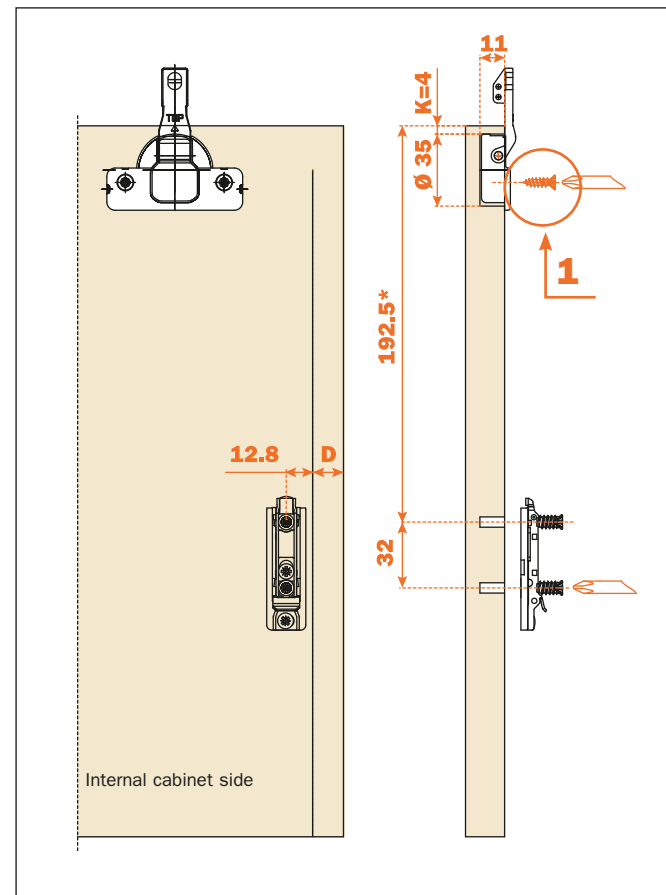
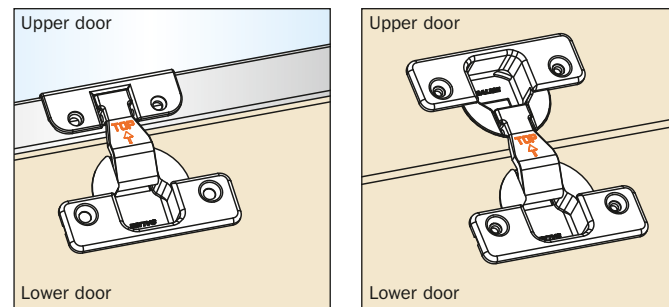


Drilling pattern for the lower alu-framed door width min. 17 mm, max. 24 mm

For alu-framed door, fix the mounting plate to the appropriate adapter.

D = sideways overlay

* Dimension is valid for cabinet heights 600, 660, 720 and 780 mm.
For cabinets of different heights, please consult Salice customer service for the correct value.

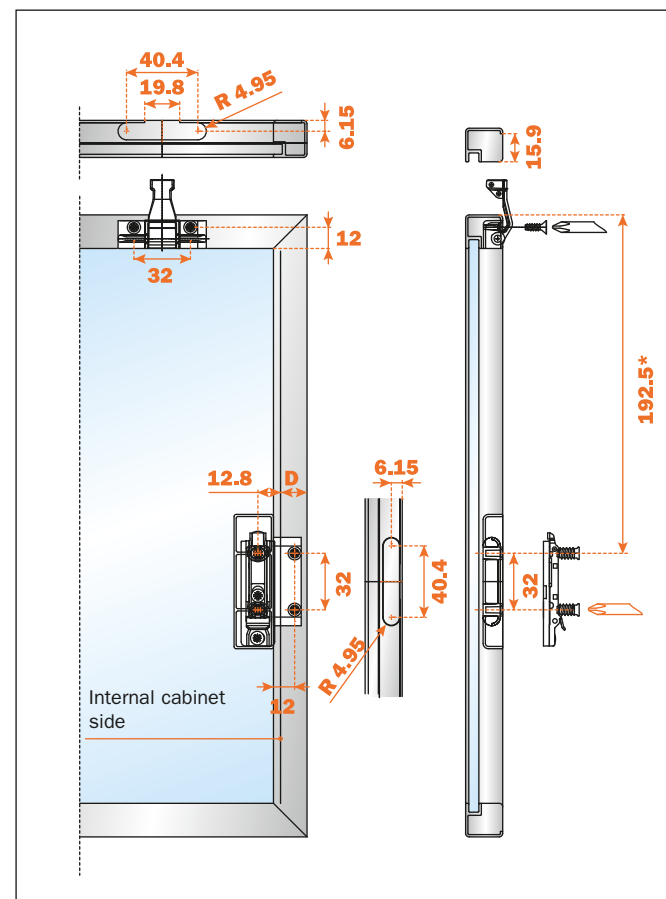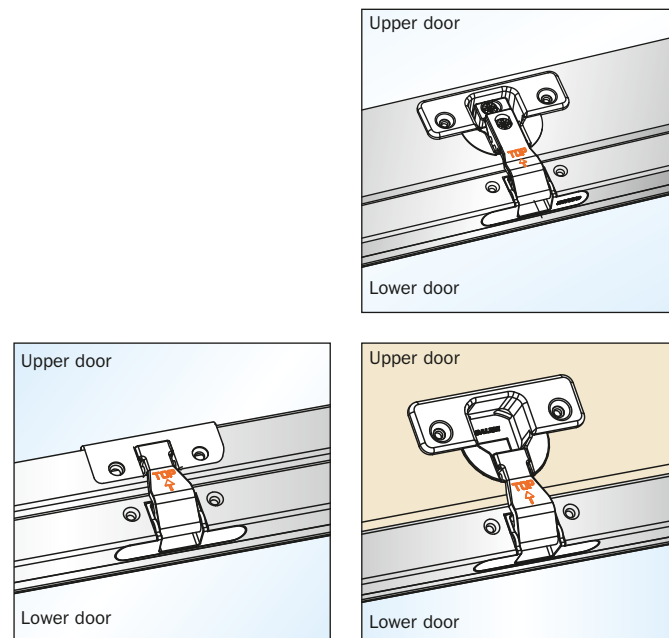



Drilling pattern for the lower alu-framed door - width min. 45 mm

Available fixing systems for the hinge cup:


A = wood screw fixing, 48x6 mm drilling
P = wood screw fixing, 45x9.5 mm drilling
U = wood screw fixing, 52x5.5 mm drilling

D = sideways overlay


* Dimension is valid for cabinet heights 600, 660, 720 and 780 mm.
For cabinets of different heights, please consult Salice customer service for the correct value.

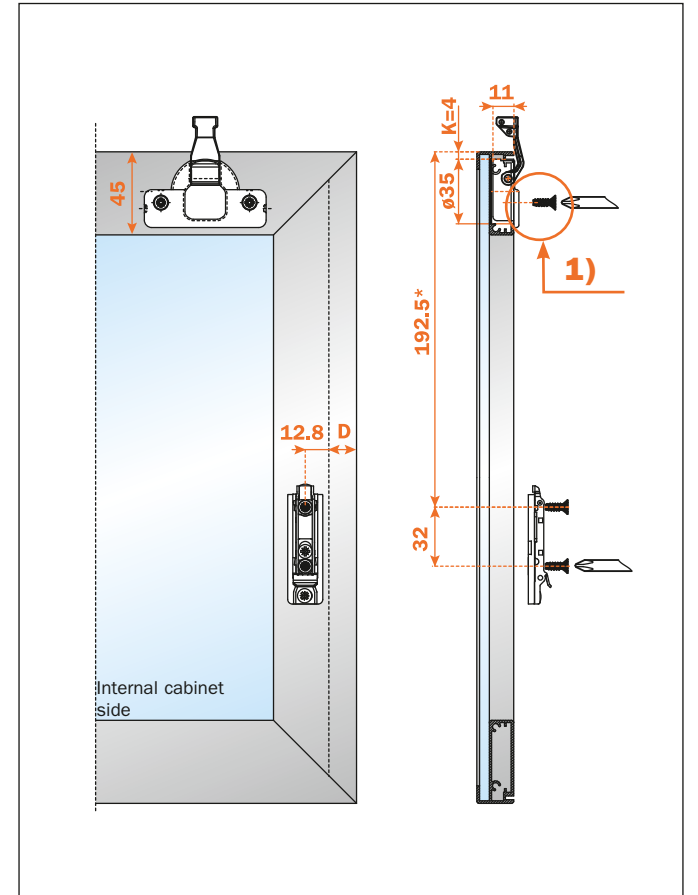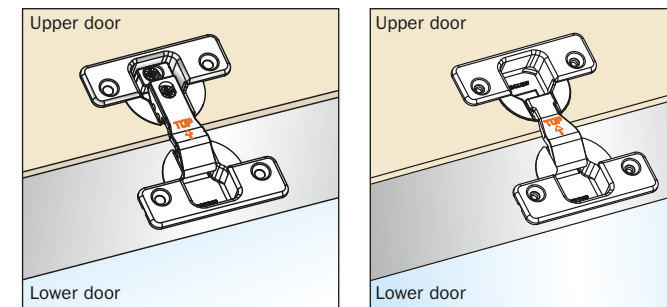


Fitting the doors to the cabinet

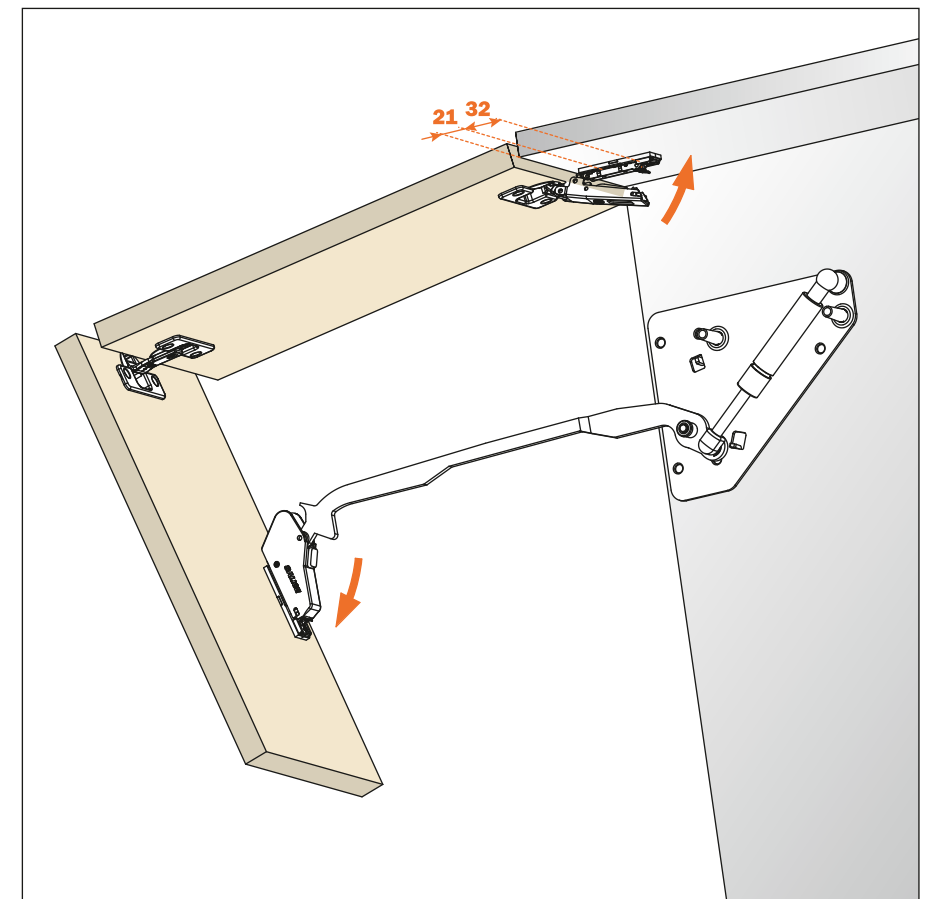


Installing the cover

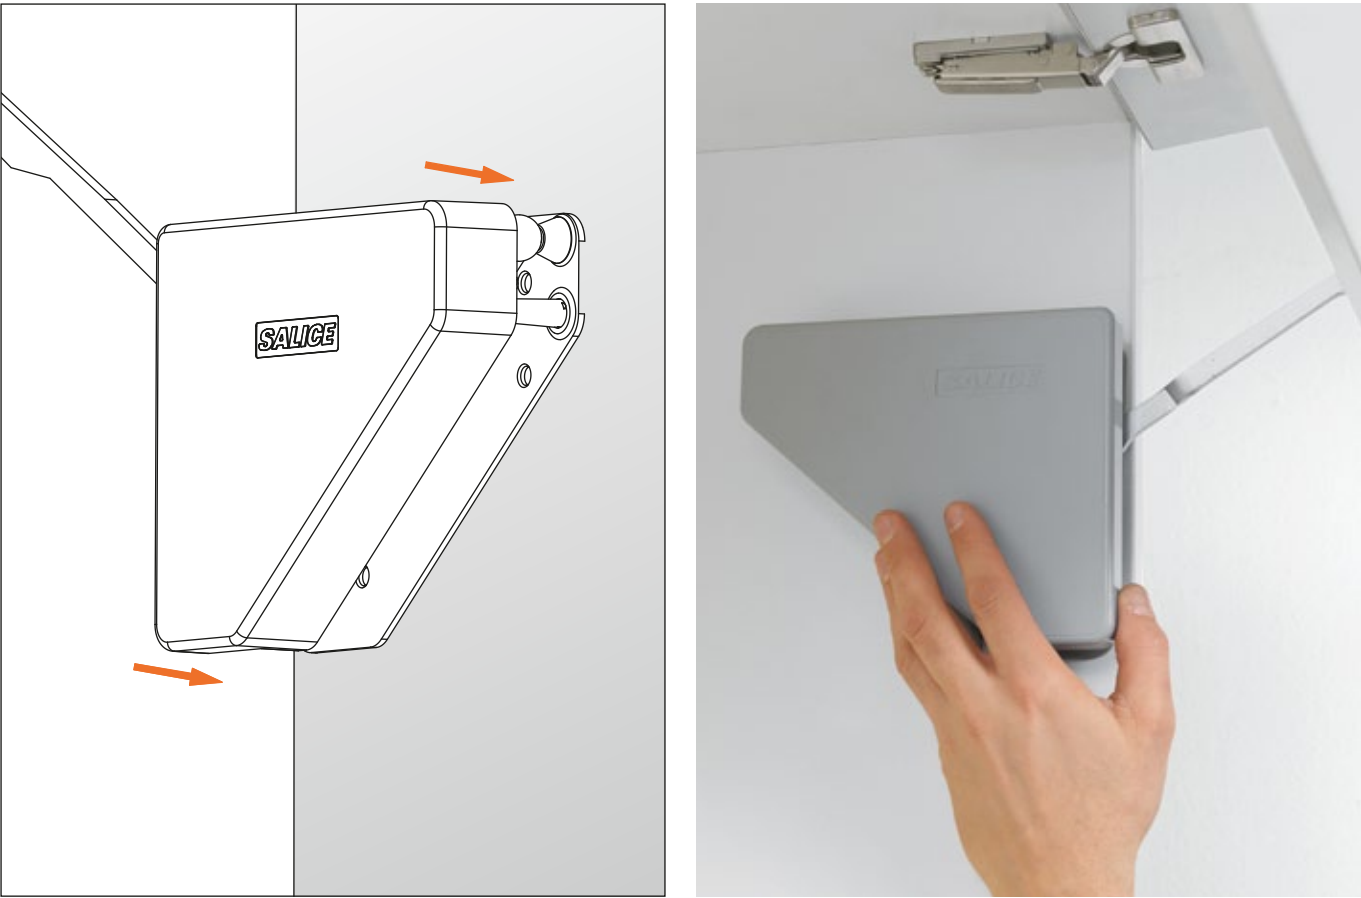

Dimensions of the system

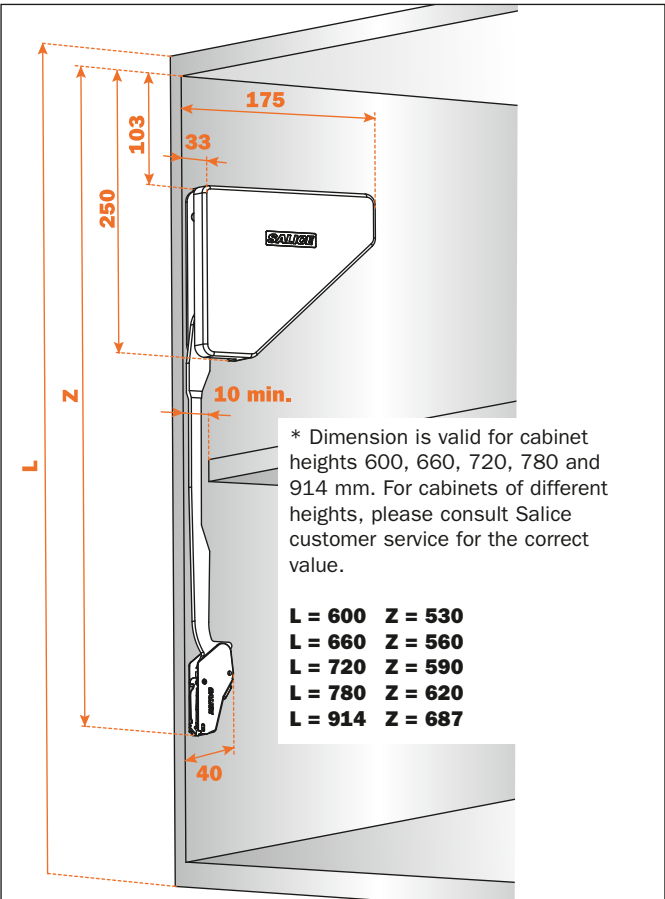


The shape of the lifting arm allows the use of shelves with a reduced depth of 10 mm only compared with the cabinet depth.

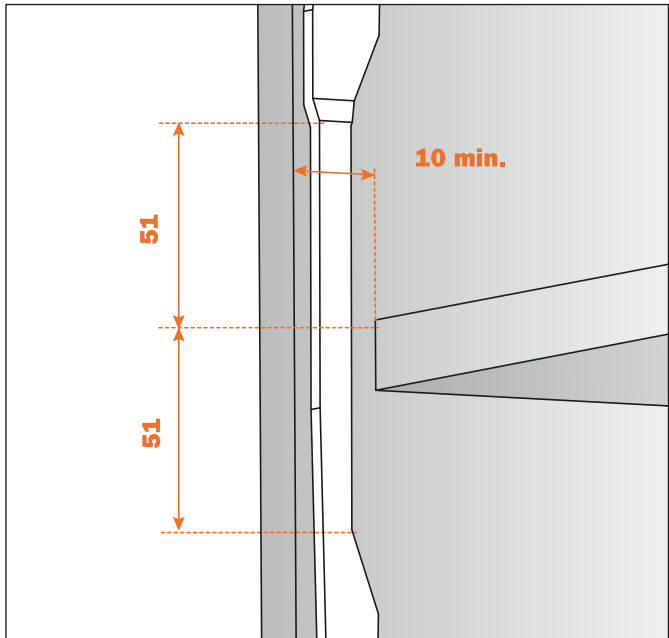

Replacement of the gas piston

Disconnect the lever arm from the lower door

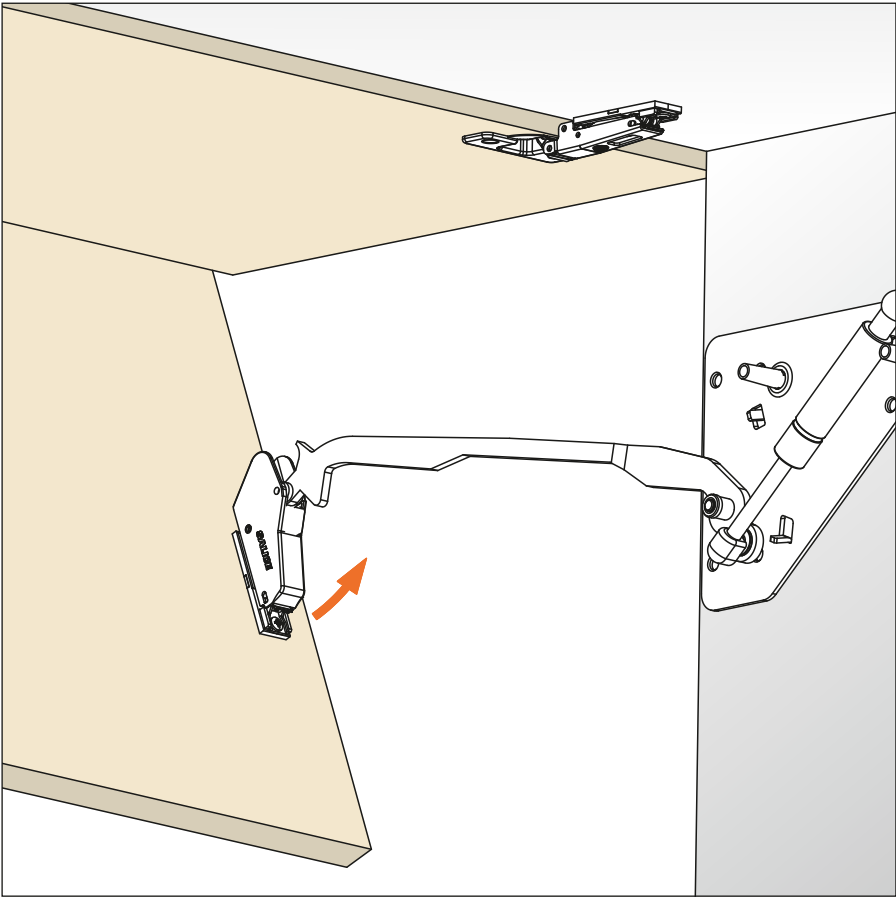

Disconnect the gas piston when it is fully extended

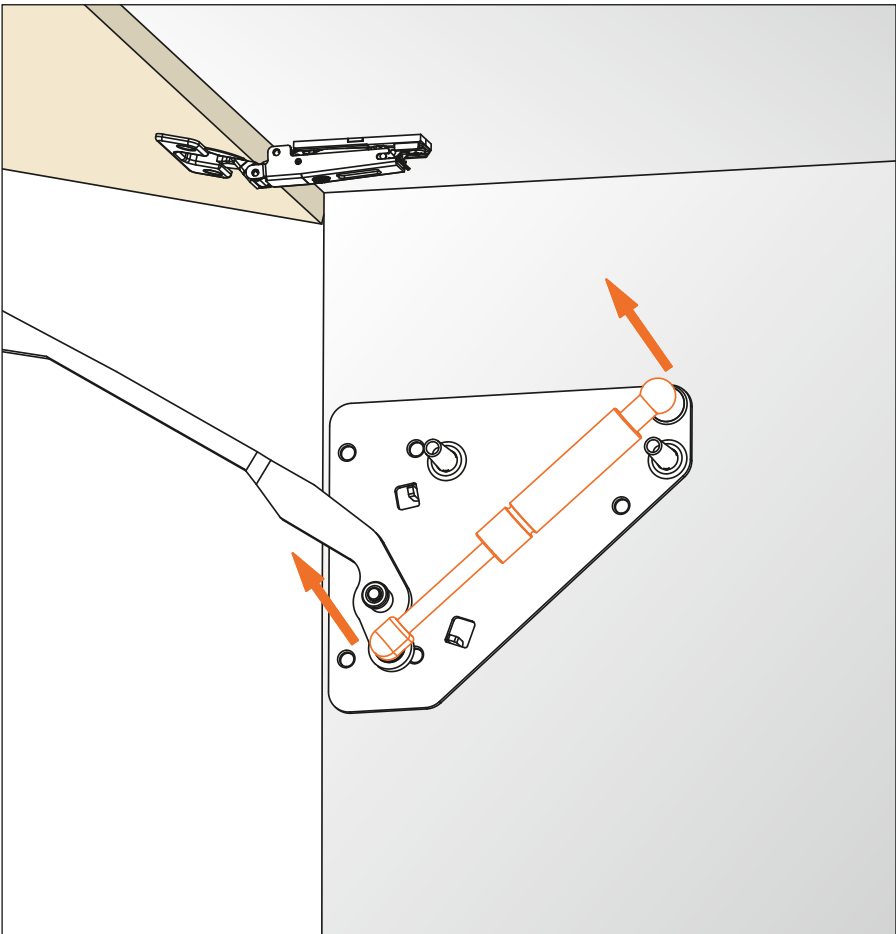


Chart for FLMGSExxx pistons with single-operation door opening

Chart to define the exact strength of the pistons to be used in relationship with the dimensions and weight of the doors.
It is suggested that some assembly trials are made. Our technical assistance service is at your disposal for any additional information.
For wall cabinet width 600 mm, it is possible to use one system only, right or left version.










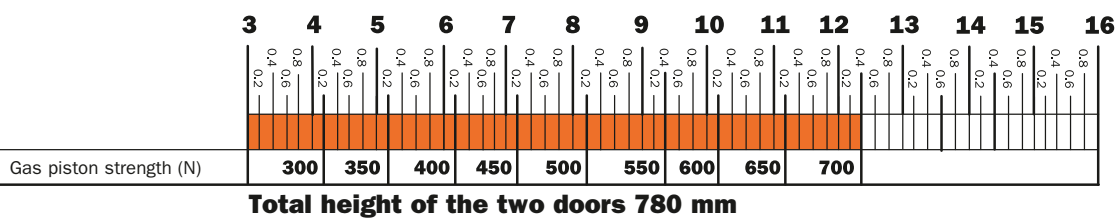


Chart for FLMGRExxx pistons with progressive-operation door opening

Chart to define the exact strength of the pistons to be used in relationship with the dimensions and weight of the doors.
It is suggested that some assembly trials are made. Our technical assistance service is at your disposal for any additional information.
For wall cabinet width 600 mm, it is possible to use one system only, right or left version.

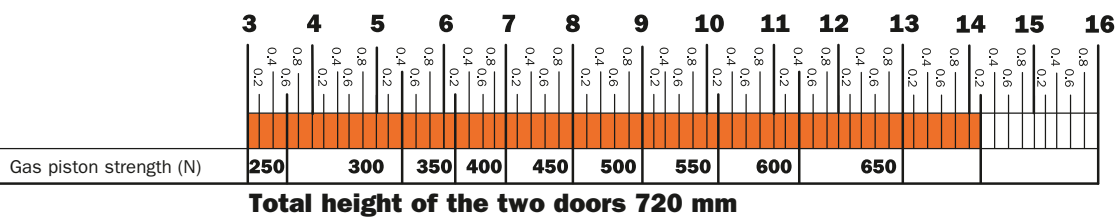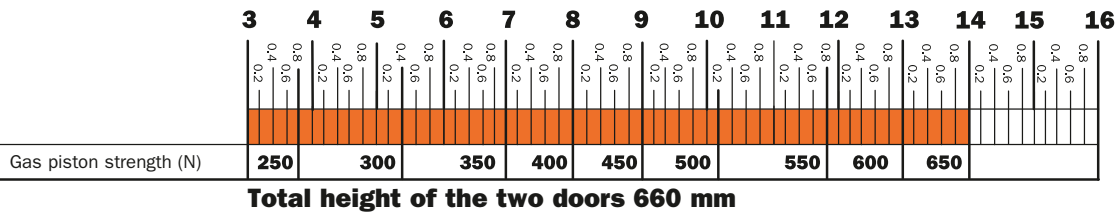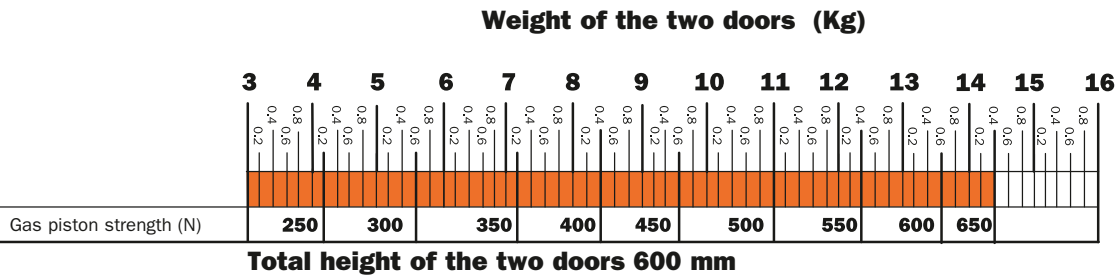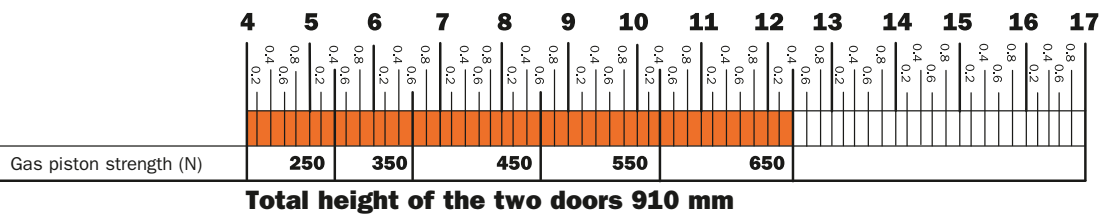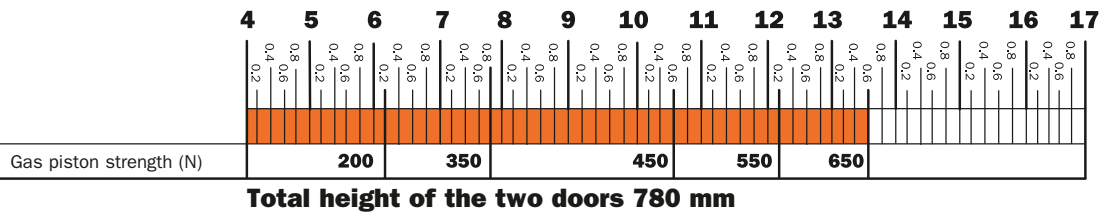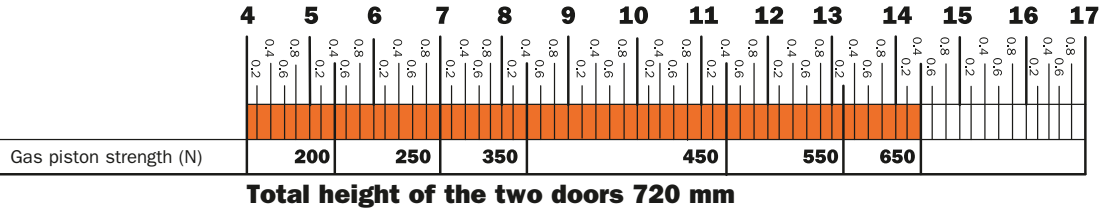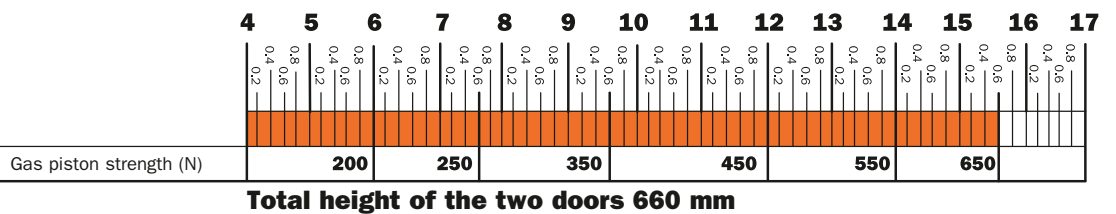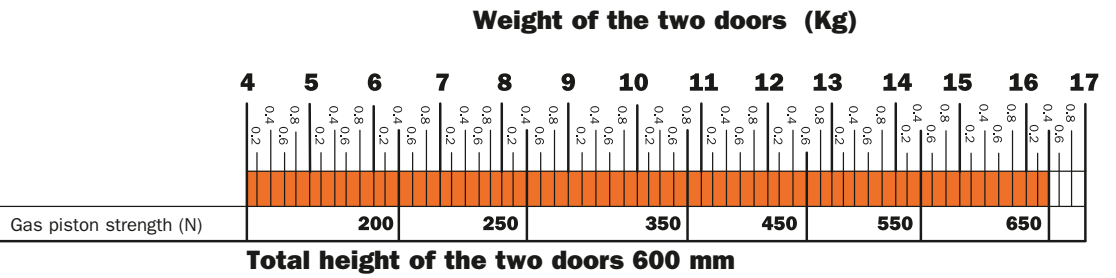

Lift - Opening systems - Parallel opening door

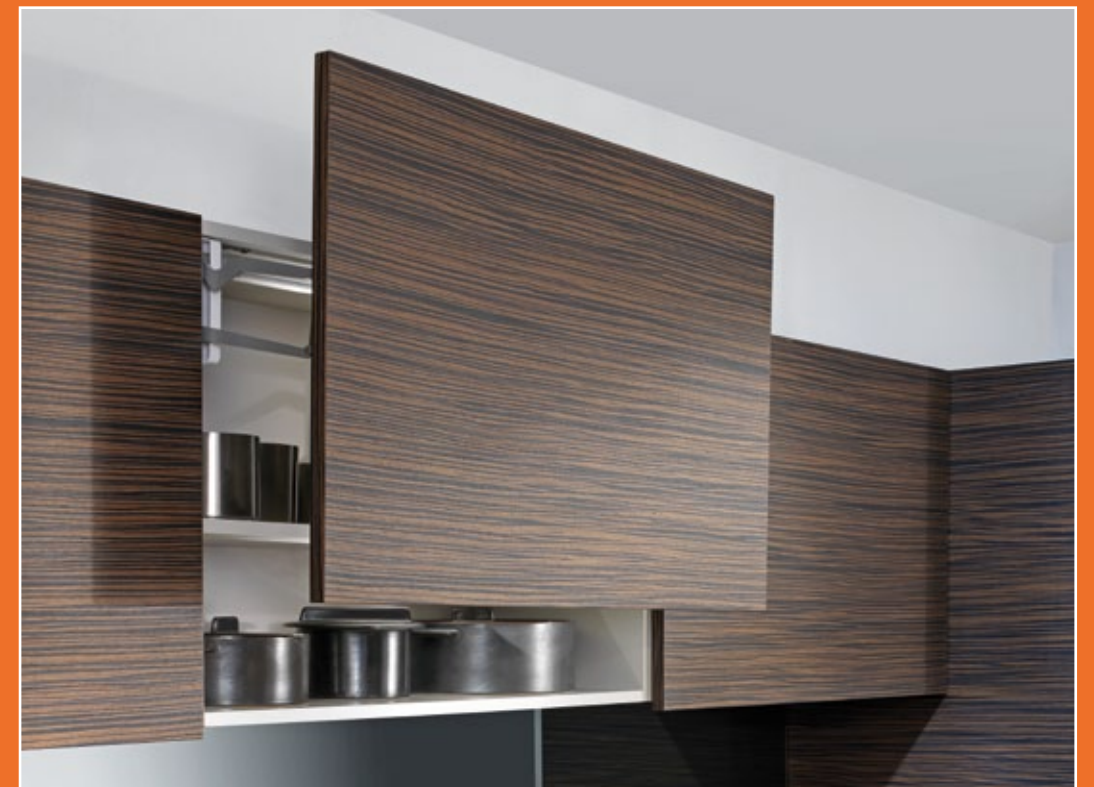

Lift - Opening systems - Parallel opening door
For doors from 360 mm to 440 mm height



Part number composition

- F** = Lifting system
- P** = Parallel opening door
- XXXXXX** = Special options
- SN** = Cover with Salice logo / **99** = Cover with arrangement for screw cover cap
- X** = Colour of the cover
- X1** = Cover with silk-screen printed log

FPXXXXXXSNX

- G** = grey cover
- 1** = white cover
- 9** = nickel-pl. cover



FPXXXXXX999

Part number for Lift system supplied with nickel-plated cover with arrangement for screw cover cap.

Screw cover cap to be ordered separately.



FPXXXXXX_9X1

Part number for Lift system supplied with nickel-plated cover with silk-screen printed logo.

Lift - Opening systems - Parallel opening door
For doors from 360 mm to 440 mm height



Components of the system for wooden door



FPXXXXXXSNX
Lifting system - **right** side

Lifting system - **left** side
Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 6 pairs

To be ordered separately:

BAPGR39 Mounting plate for door



Packing
Boxes 300 pcs.

Smove

D00SSNG For doors of small weight and dimensions.



Packing
Boxes 250 pcs.

FLMGSE [XXX] ← Fill with the required piston strength



Gas piston.
See page 337 to complete the part number with the appropriate piston strength.

Packing
Boxes 12 pcs.

Smove

D00FSNG For doors of middle weight and dimensions.



Packing
Boxes 250 pcs.

FLMGRE [XXX] ← Fill with the required piston strength



Progressive gas piston.
See page 337 to complete the part number with the appropriate piston strength.

Packing
Boxes 12 pcs.

Smove

D00LSNG For doors of large weight and dimensions.



Packing
Boxes 250 pcs.

Stabilizer bar




FPXX59KX457 for door width 600 mm
FPXX59KX757 for door width 900 mm
FPXX59K1057 for door width 1200 mm

Packing
Boxes 6 pcs.



Components of the system for alu-framed door

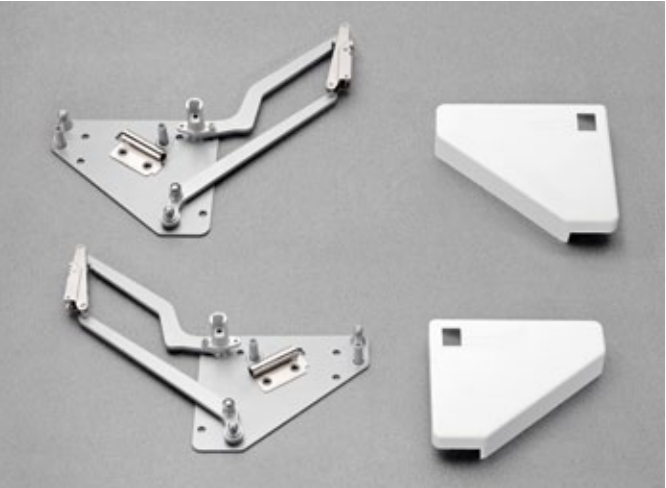

FPXXXXXXSNX
Lifting system - **right** side

Lifting system - **left** side
Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 6 pairs

To be ordered separately:

BAP3R39 Mounting plate for door



Packing
Boxes 300 pcs.

Smove

D00SSNG For doors of small weight and dimensions.



Packing
Boxes 250 pcs.

FLMGSE [XXX] ← Fill with the required piston strength



Gas piston.
See page 337 to complete the part number with the appropriate piston strength.

Packing
Boxes 12 pcs.

Smove

D00FSNG For doors of middle weight and dimensions.



Packing
Boxes 250 pcs.

FLMGRE [XXX] ← Fill with the required piston strength



Progressive gas piston.
See page 337 to complete the part number with the appropriate piston strength.

Packing
Boxes 12 pcs.

Smove

D00LSNG For doors of large weight and dimensions.



Packing
Boxes 250 pcs.

DBZXBH9



Support for plate with fixing screws.

Packing
Boxes 150 pcs.

Stabilizer bar



FPXX59KX457 for door width 600 mm
FPXX59KX757 for door width 900 mm
FPXX59K1057 for door width 1200 mm

Packing
Boxes 6 pcs.

Lift - Opening systems - Parallel opening door
For doors from 440 mm to 660 mm height



Part number composition

- F = Lifting system
- P = Parallel opening door
- XXXXXX = Special options
- SN = Cover with Salice logo / 99 = Cover with arrangement for screw cover cap
- X = Colour of the cover
- L = Long arm
- X1 = Cover with silk-screen printed logo

FPXXXXXXSNXL

G = grey cover
1 = white cover
9 = nickel-pl. cover




FPXXXXXX999L

Part number for LIFT system supplied with nickel-plated cover with arrangement for screw cover cap.



FPXXXXXX_9LX1

Part number for LIFT system supplied with nickel-plated cover with silk-screen printed logo.



Components of the system for wooden door



FPXXXXXXSNXL
Lifting system - **right** side

Lifting system - **left** side

Cover.

Colour of the cover:

- G = grey
- 1 = white
- 9 = nickel-pl.

Packing
Boxes 6 pairs

To be ordered separately:

BAPGR39

Mounting plate for door



Packing
Boxes 300 pcs.

D00SSNG

Smove

For doors of small weight and dimensions.



Packing
Boxes 250 pcs.

FLMGSE XXX

← Fill with the required piston strength



Gas piston.
See page 338 to complete the part number with the appropriate piston strength.

Packing
Boxes 12 pcs.

D00FSNG

Smove

For doors of middle weight and dimensions.



Packing
Boxes 250 pcs.

FLMGRE XXX

← Fill with the required piston strength



Progressive gas piston.
See page 339 to complete the part number with the appropriate piston strength.

Packing
Boxes 12 pcs.

D00LSNG

Smove

For doors of large weight and dimensions.



Packing
Boxes 250 pcs.

Stabilizer bar



FPXX59KX457 for door width 600 mm
FPXX59KX757 for door width 900 mm
FPXX59K1057 for door width 1200 mm


Packing
Boxes 6 pcs.

Lift - Opening systems - Parallel opening door
For doors from 440 mm to 660 mm height

Assembly instructions



Components of the system for alu-framed door

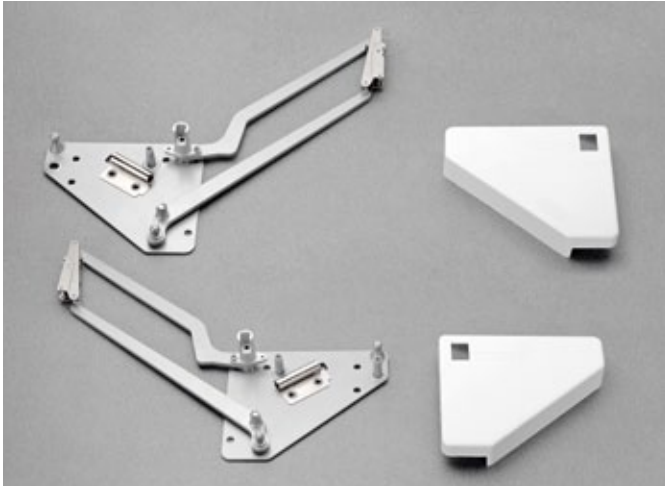

FPXXXXXXSNXL
Lifting system - **right** side

Lifting system - **left** side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 6 pairs

To be ordered separately:

BAP3R39 Mounting plate for door



Packing
Boxes 300 pcs.

FLMGSE XXX ← Fill with the required piston strength



Gas piston.
See page 338 to complete
the part number with the
appropriate piston strength.

Packing
Boxes 12 pcs.

FLMGRE XXX ← Fill with the required piston strength



Progressive gas piston.
See page 339 to complete
the part number with the
appropriate piston strength.

Packing
Boxes 12 pcs.

DBZXBH9 Support for plate with fixing
screws.



Packing
Boxes 150 pcs.


Stabilizer bar



FPXX59KX457 for door width 600 mm
FPXX59KX757 for door width 900 mm
FPXX59K1057 for door width 1200 mm


Packing
Boxes 6 pcs.

Fixing the support to the cabinet side

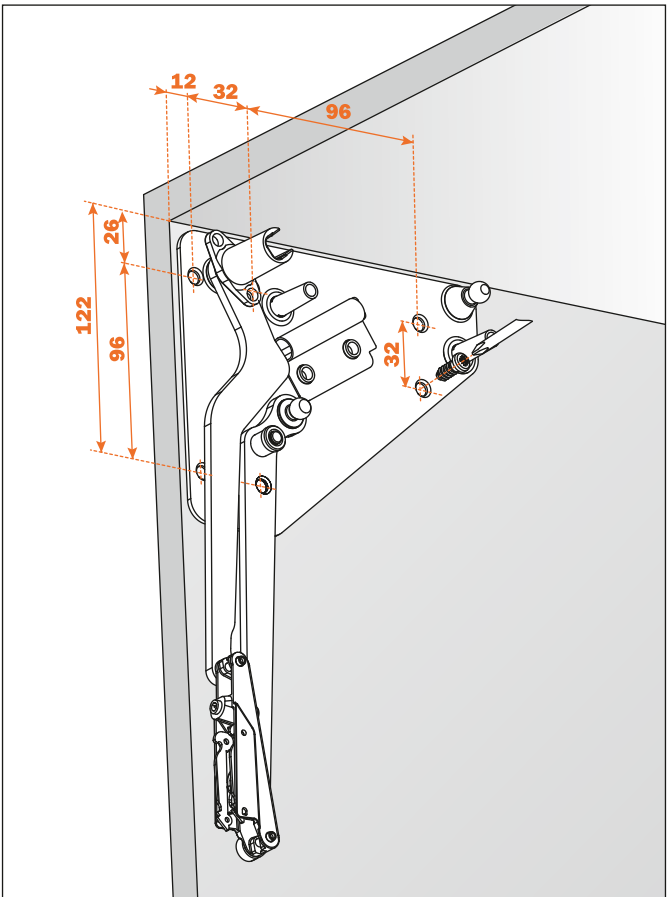


Deploying the piston


Carefully press each end of the piston securely onto the pins on
the bracket and lifting arm, ensuring that the body of the piston
is uppermost.

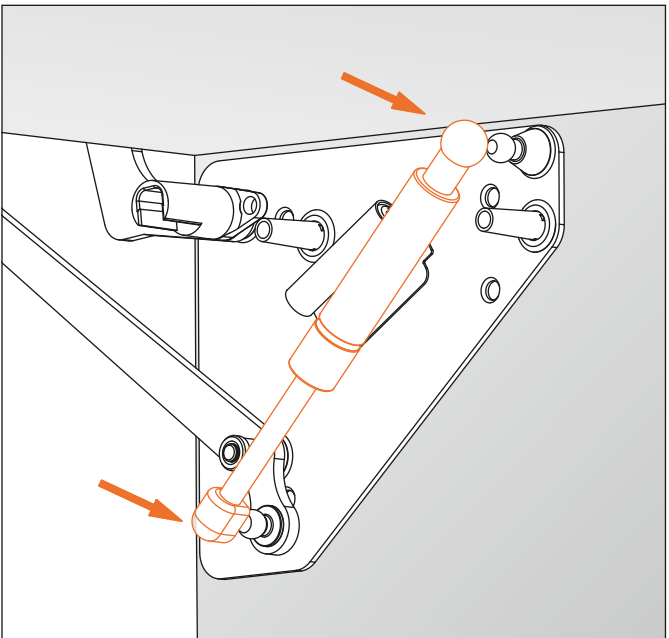


Installing the Smove

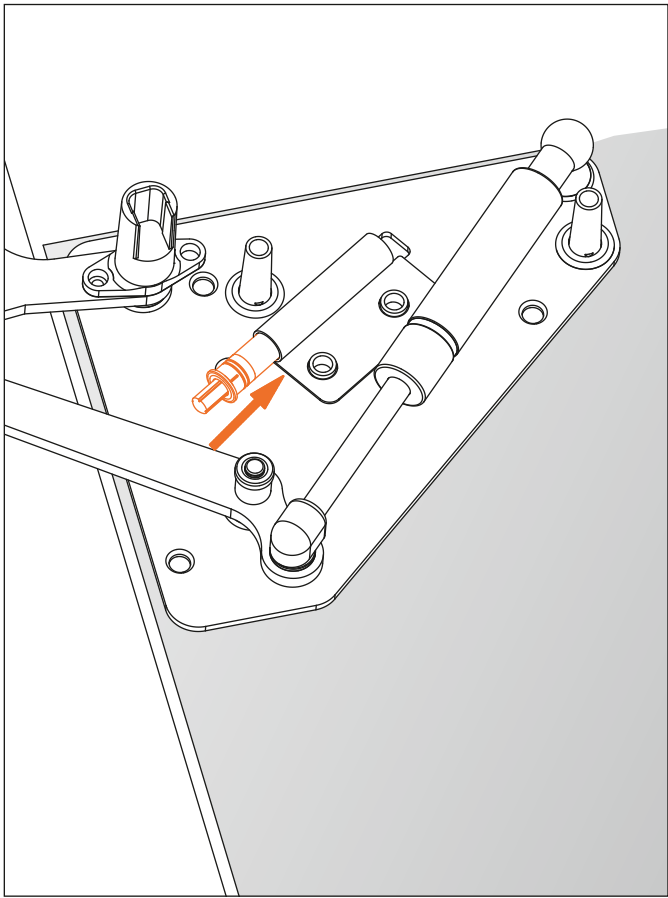

Installing the cover

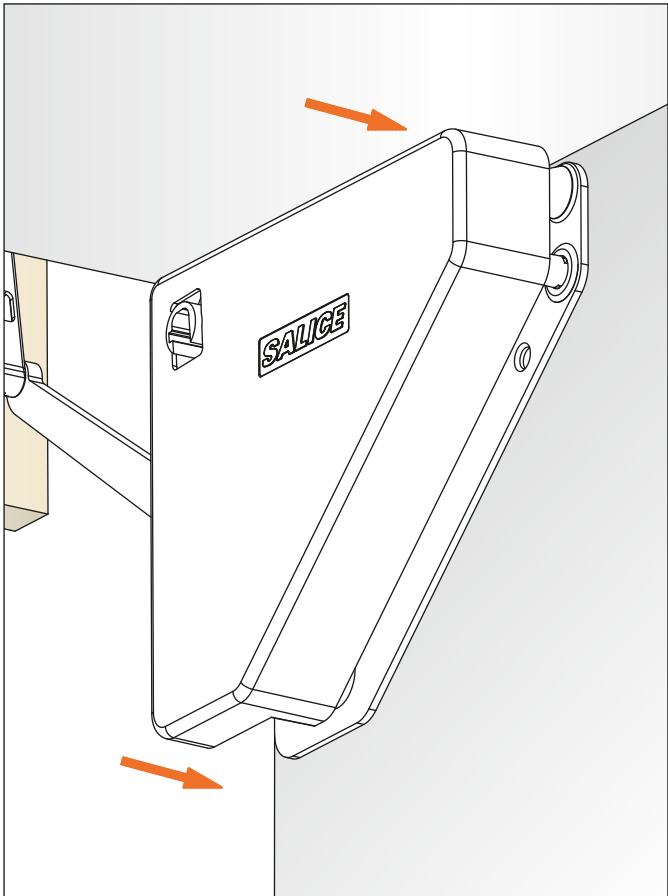


Fitting the stabilizer bar

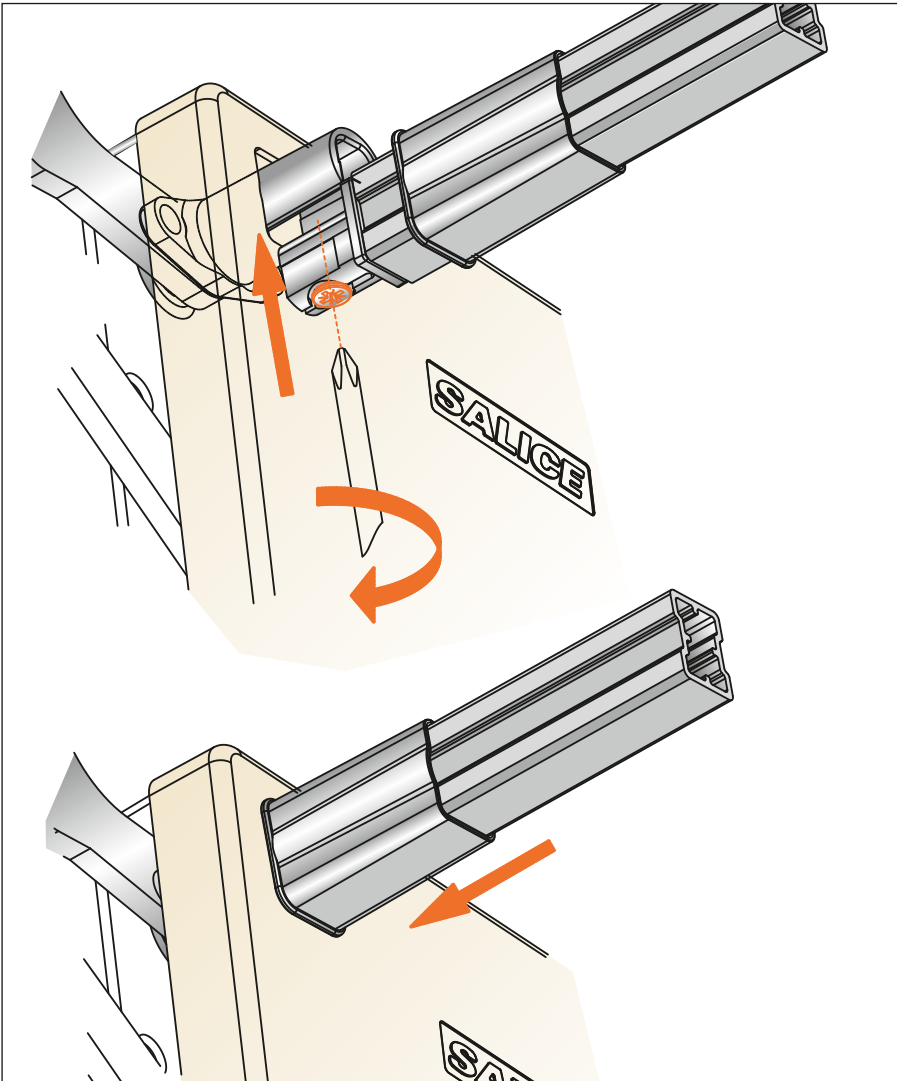


Insert the ends of the bar into the housing and fasten the fixing screw.



Slide the sleeves over the housing at each end of the bar.

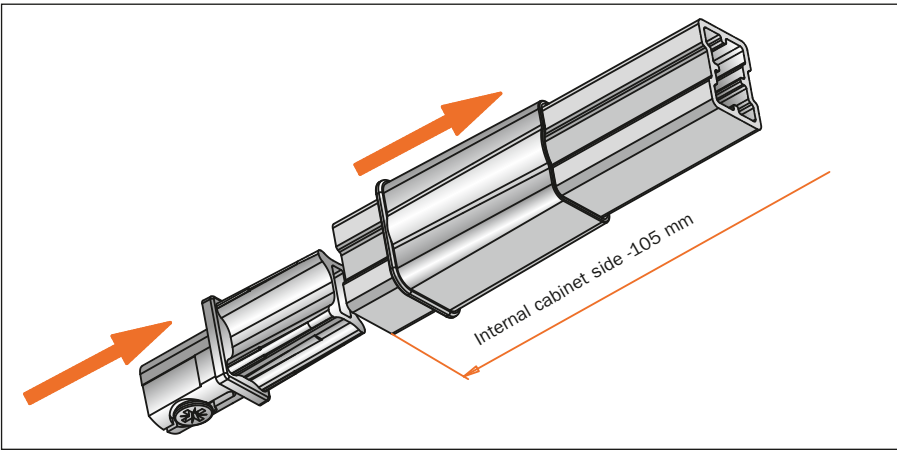



In case of cabinets with special widths, pull the bar end off one side and cut it accordingly. Re-insert the bar end into the housing.

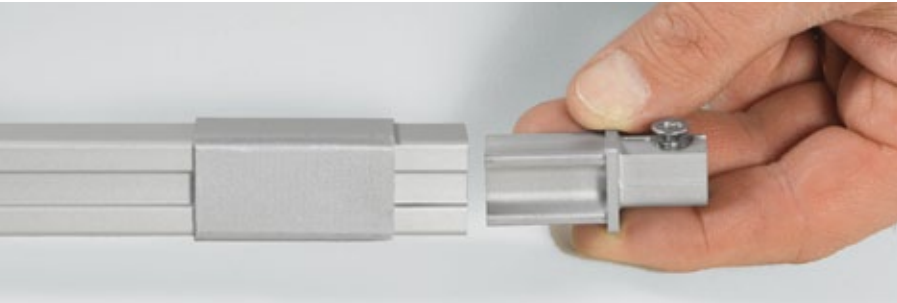


Drilling pattern for wooden door and alu-framed door
For doors from 360 to 440 mm height

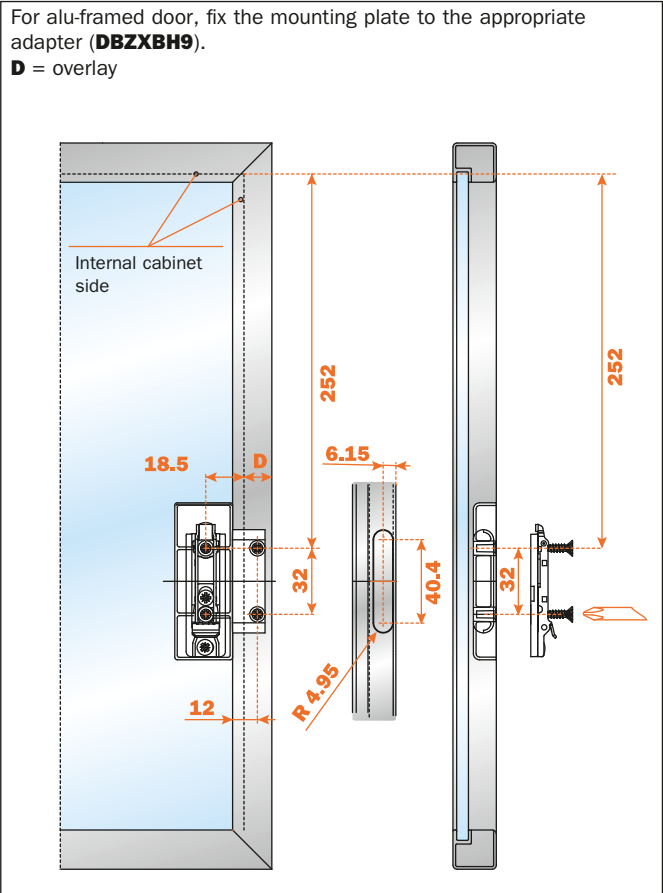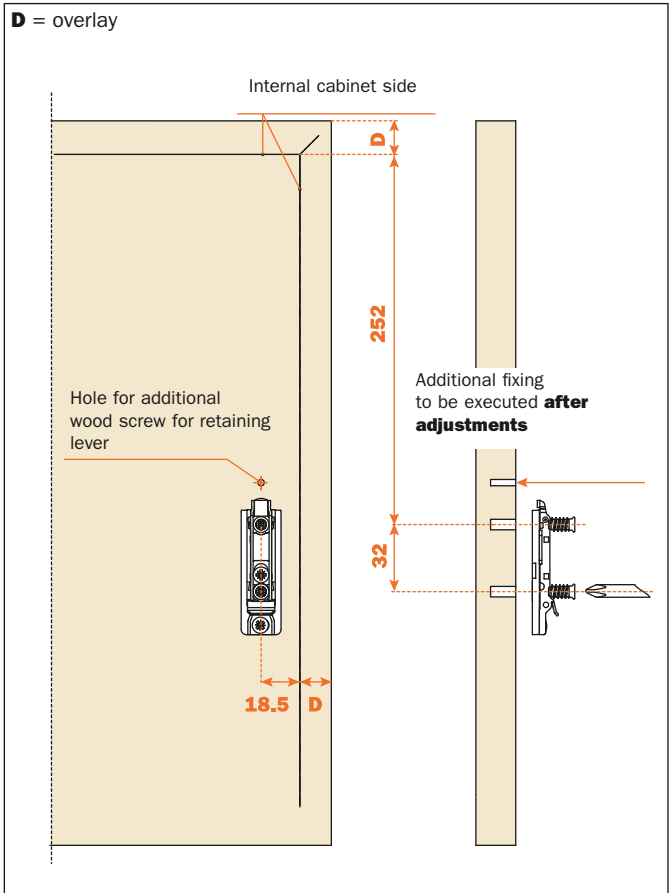


Drilling pattern for wooden door and alu-framed door
For doors from 440 to 660 mm height.

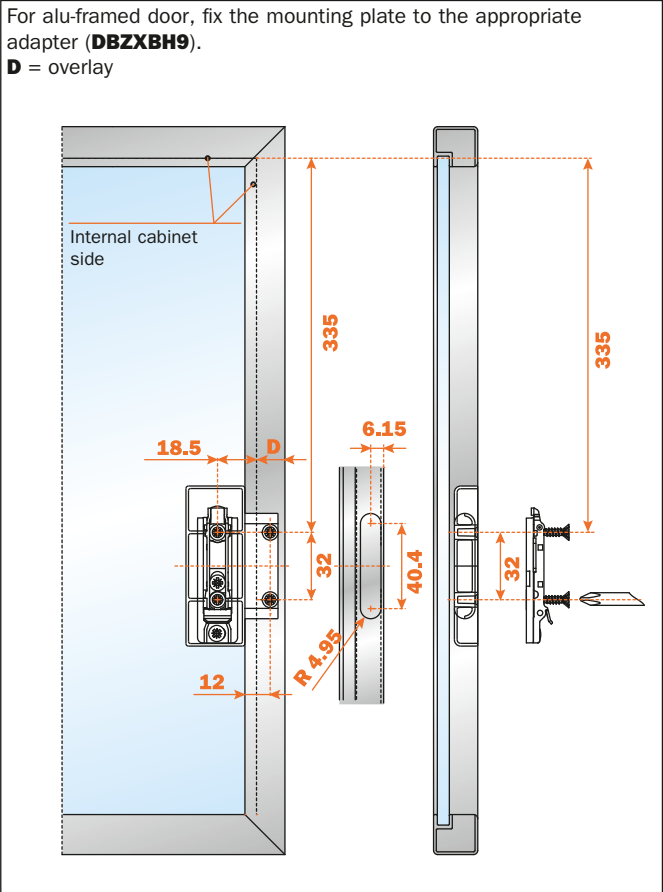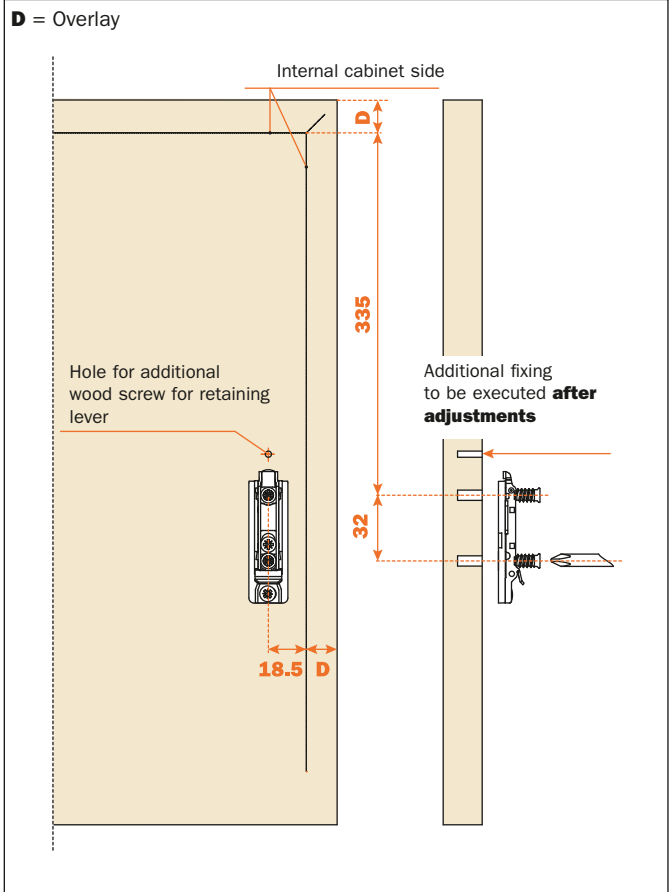



Fitting the door to the cabinet

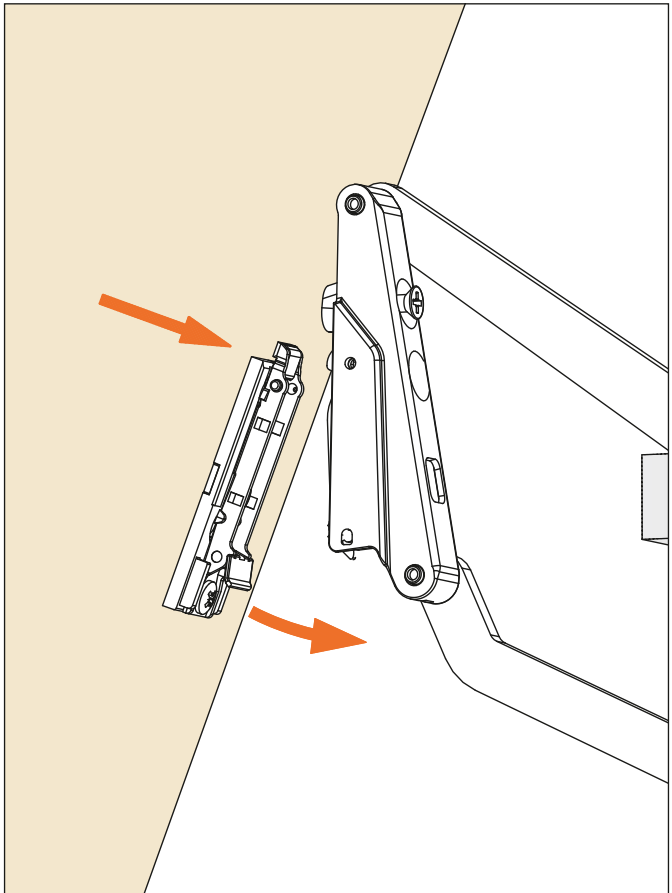



Adjustments and additional fixing

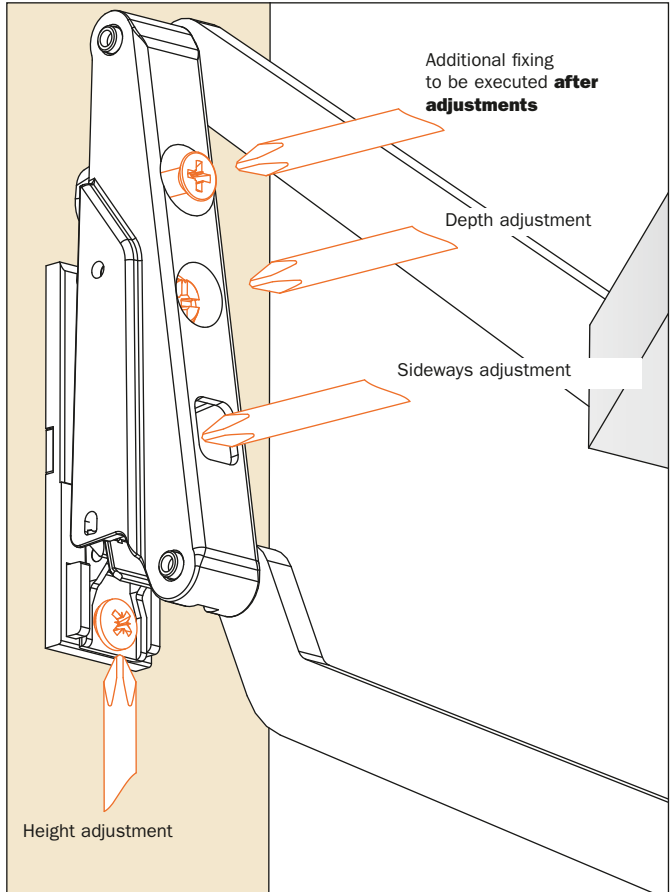


Dimensions of the system for doors from 360 to 440 mm height

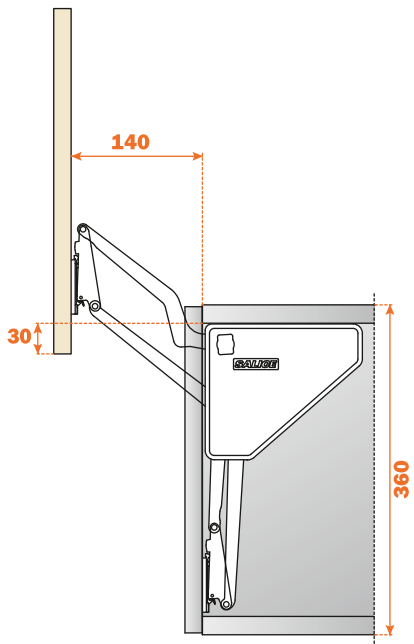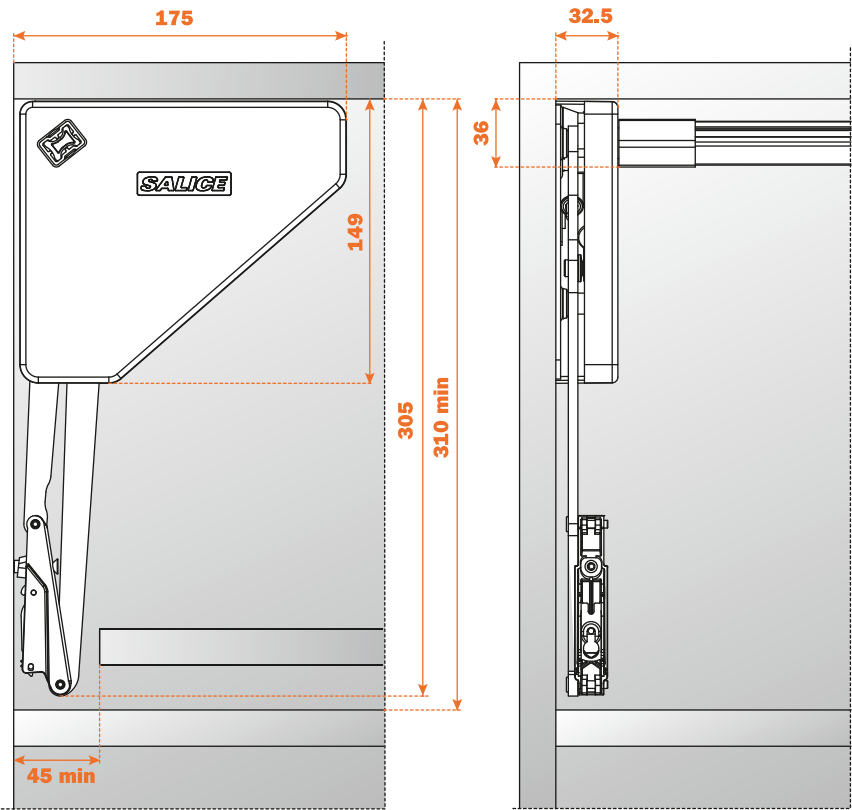

Dimensions of the system for doors from 440 to 660 mm height

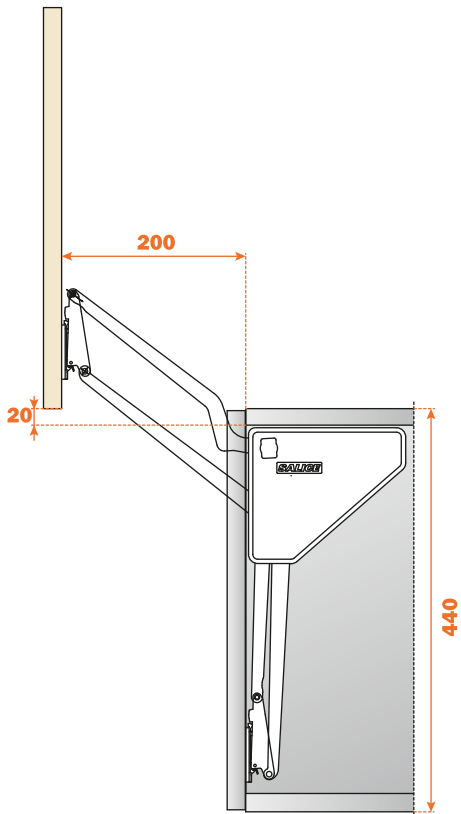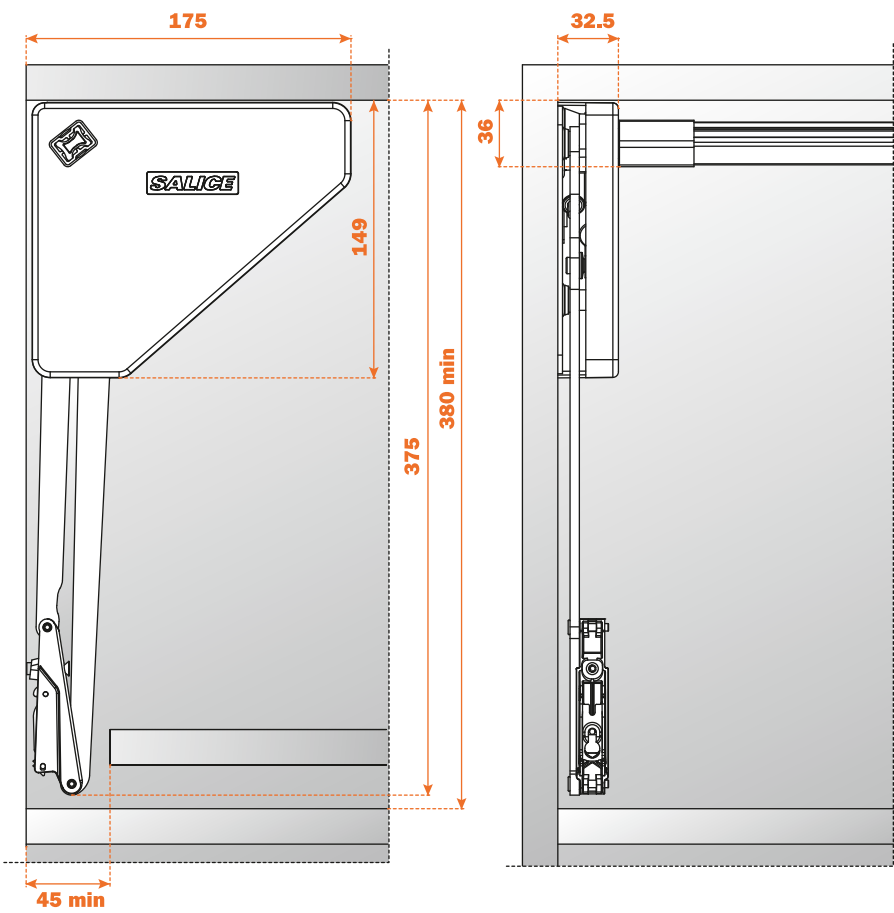

Disassembly

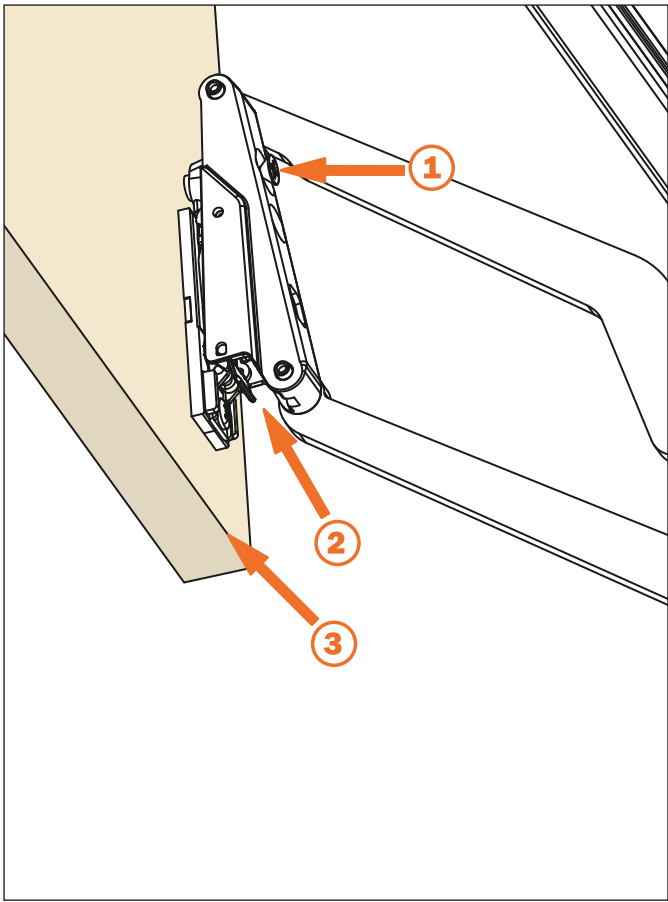

- 1) Loosen the additional wood screw
- 2) then press firmly on the mounting plate lever
- 3) push the door



Gas piston strength

Chart for FLMGSExxx pistons with single-operation door opening for doors from 360 to 440 mm height

Chart to define the exact strength of the pistons to be used in relationship with the dimensions and weight of the doors.



Chart for FLMGRExxx pistons with progressive-operation door opening for doors from 360 to 440 mm height

Chart to define the exact strength of the pistons to be used in relationship with the dimensions and weight of the doors.

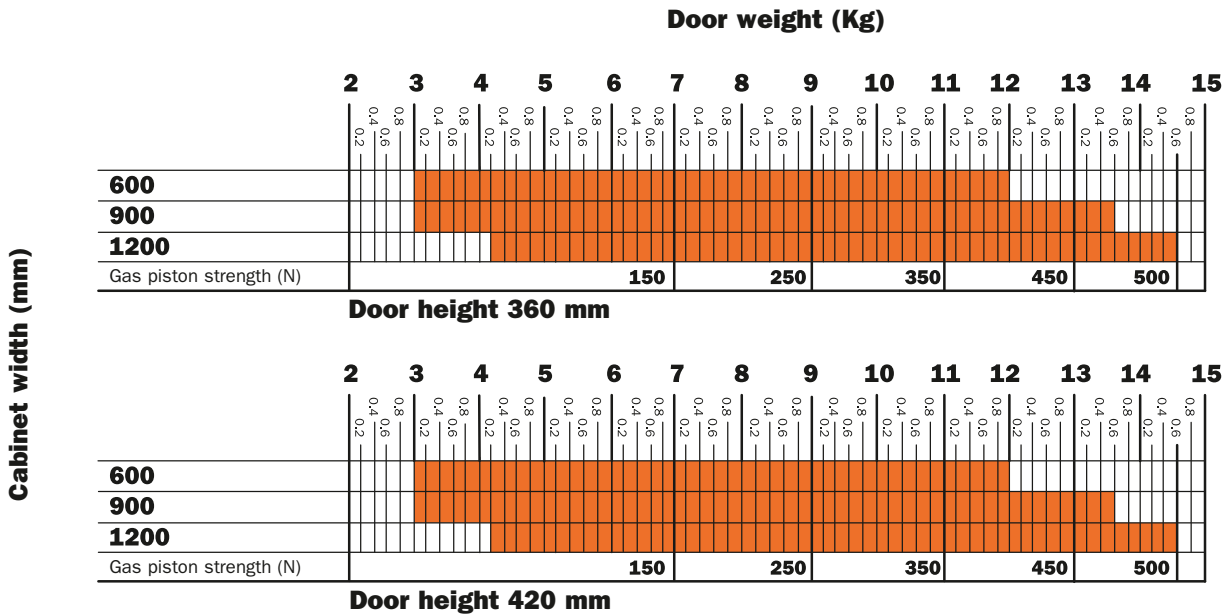


Chart for FLMGSExxx pistons with single-operation door opening for doors from 440 to 660 mm height.

Chart to define the exact strength of the pistons to be used in relationship with the dimensions and weight of the doors.


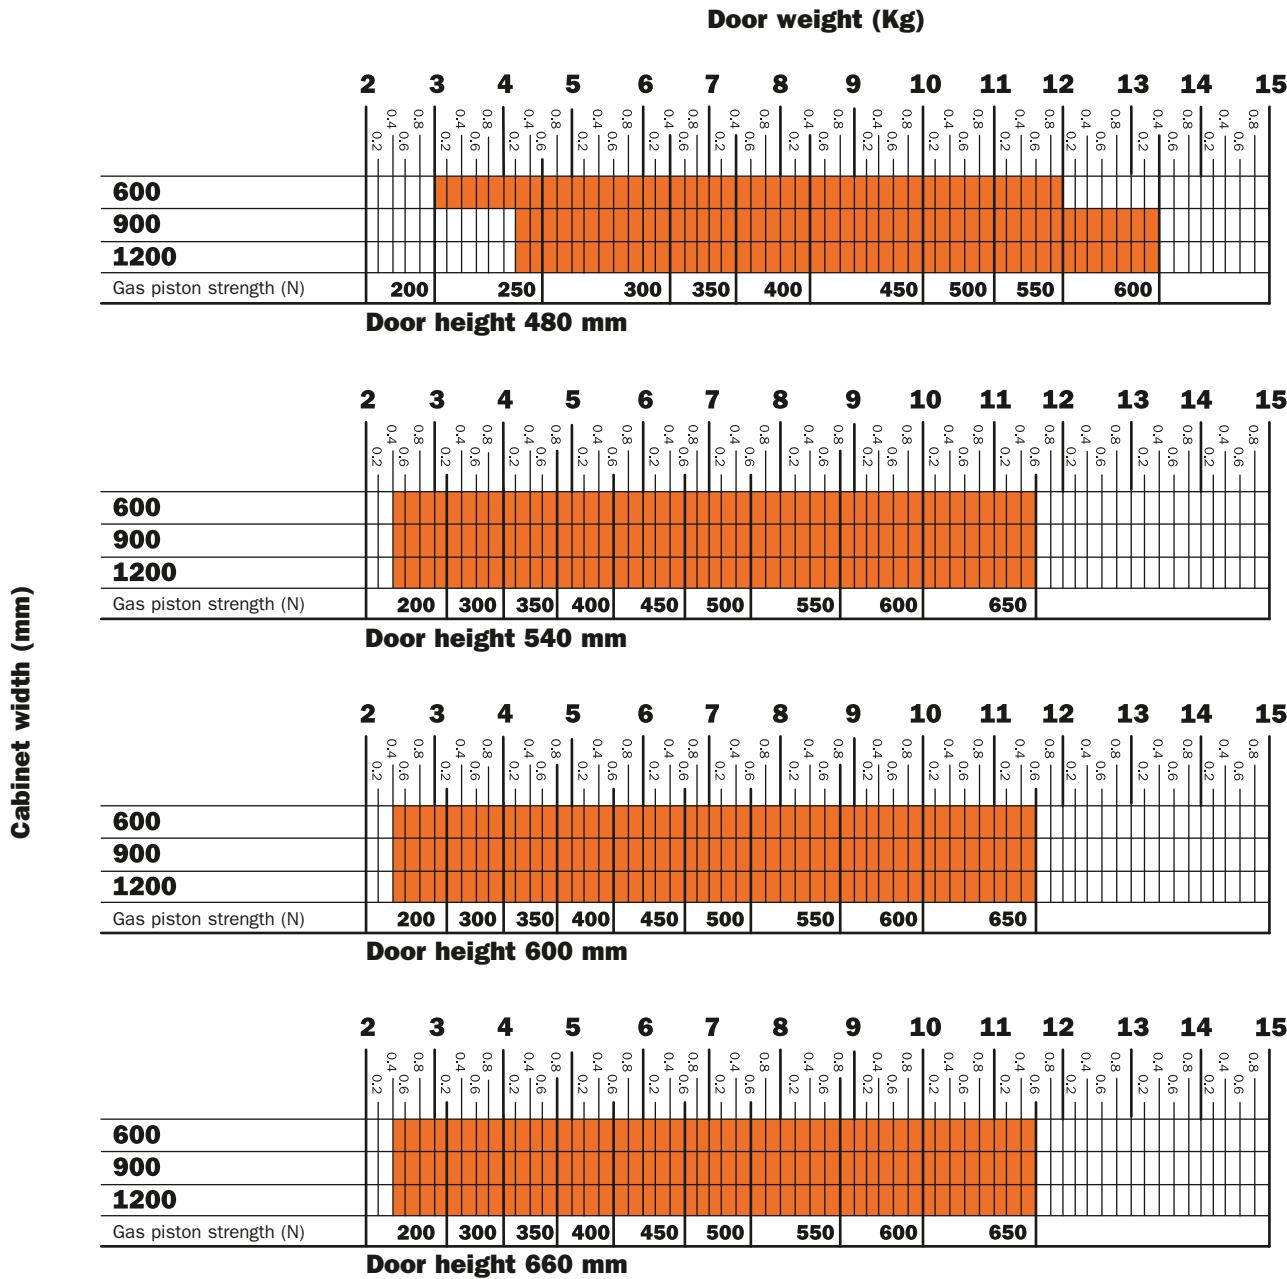


Chart for FLMGRExxx pistons with progressive-operation door opening for doors from 440 to 660 mm height.

Chart to define the exact strength of the pistons to be used in relationship with the dimensions and weight of the doors.



Lift - Opening systems - Swing opening door

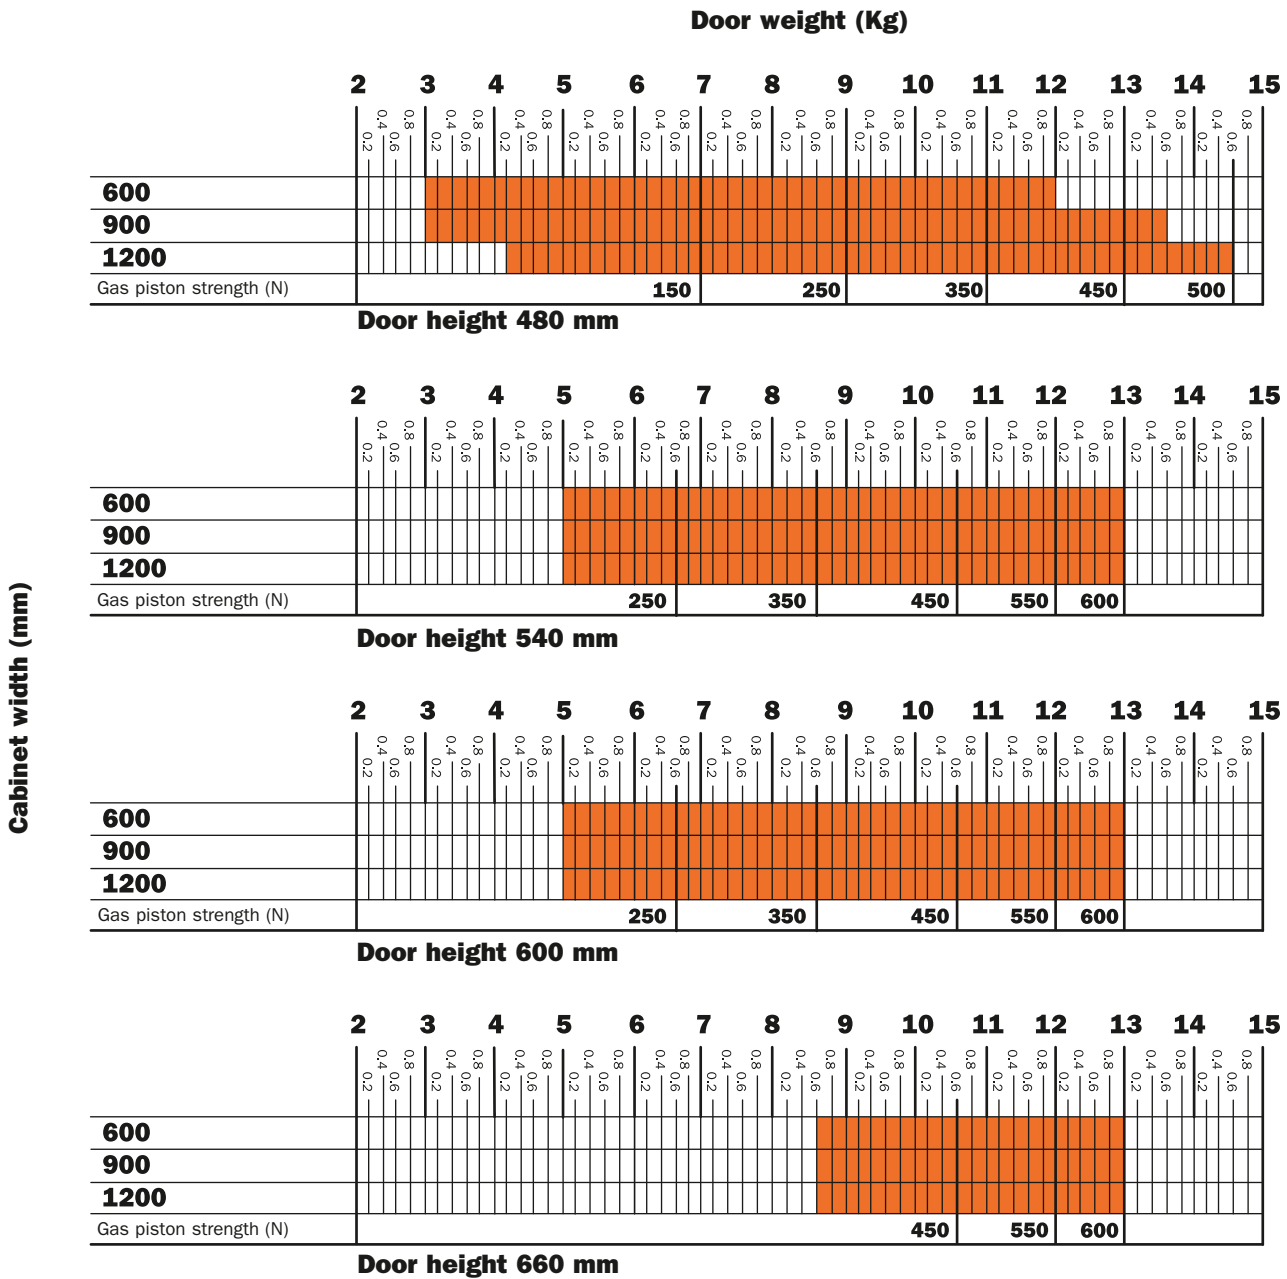



Part number composition

- F = Lifting system
- B = Swing opening door
- XXXXXX = Special options
- SN = Cover with Salice logo / 99 = Cover with arrangement for screw cover cap
- X = Colour of the cover
- X1 = Cover with silk-screen printed logo

FBXXXXXXSNX

- G = grey cover
- 1 = white cover
- 9 = nickel-pl. cover



FBXXXXXX999


Part number for Lift system supplied with nickel-plated cover with arrangement for screw cover cap.

Screw cover cap to be ordered separately.




FBXXXXXX_9X1

Part number for Lift system supplied with nickel-plated cover with silk-screen printed logo.



Components of the system for wooden door

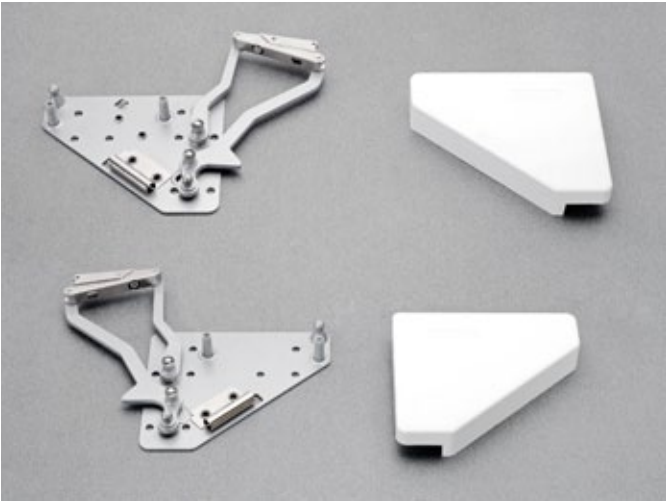

FBXXXXXXSNX

Lifting system - **right** side

Lifting system - **left** side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 6 pairs

To be ordered separately:

BAPGR39

Mounting plate for door



Packing
Boxes 300 pcs.

D00SSNG

Smove

For doors of small weight and dimensions.



Packing
Boxes 250 pcs.

FLMGSEXXX ← Fill with the required piston strength



Gas piston.
See page 351 to complete the part number with the appropriate piston strength.

Packing
Boxes 12 pcs.

D00FSNG

Smove

For doors of middle weight and dimensions.



Packing
Boxes 250 pcs.

FLMGREXXX ← Fill with the required piston strength



Progressive gas piston.
See page 352 to complete the part number with the appropriate piston strength.

Packing
Boxes 12 pcs.


D00LSNG

Smove


For doors of large weight and dimensions.



Packing
Boxes 250 pcs.



Components of the system for alu-framed door

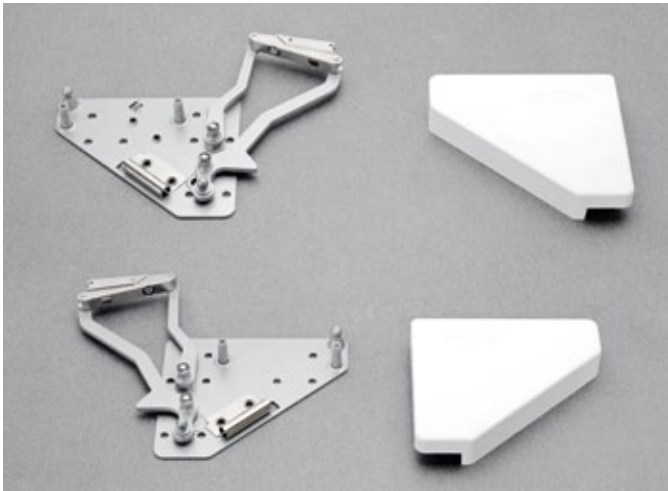

FBXXXXXXSNX
Lifting system - **right** side

Lifting system - **left** side

Cover

Colour of the cover:
G = grey
1 = white
9 = nickel-pl.

Packing
Boxes 6 pairs

To be ordered separately:

BAP3R39

Mounting plate for door



Packing
Boxes 300 pcs.

FLMGSE [XXX] ← Fill with the required piston strength



Gas piston.
See page 351 to complete
the part number with the
appropriate piston strength.

Packing
Boxes 12 pcs.

FLMGRE [XXX] ← Fill with the required piston strength



Progressive gas piston.
See page 352 to complete
the part number with the
appropriate piston strength.

Packing
Boxes 12 pcs.

DBZXBH9

Support for plate with fixing
screws.



Packing
Boxes 150 pcs.

D00SSNG



Smove
For doors of small weight and
dimensions.

Packing
Boxes 250 pcs.

D00FSNG



Smove
For doors of middle weight and
dimensions.

Packing
Boxes 250 pcs.


D00LSNG



Smove
For doors of large weight and
dimensions.


Packing
Boxes 250 pcs.

Fixing the support to the cabinet side

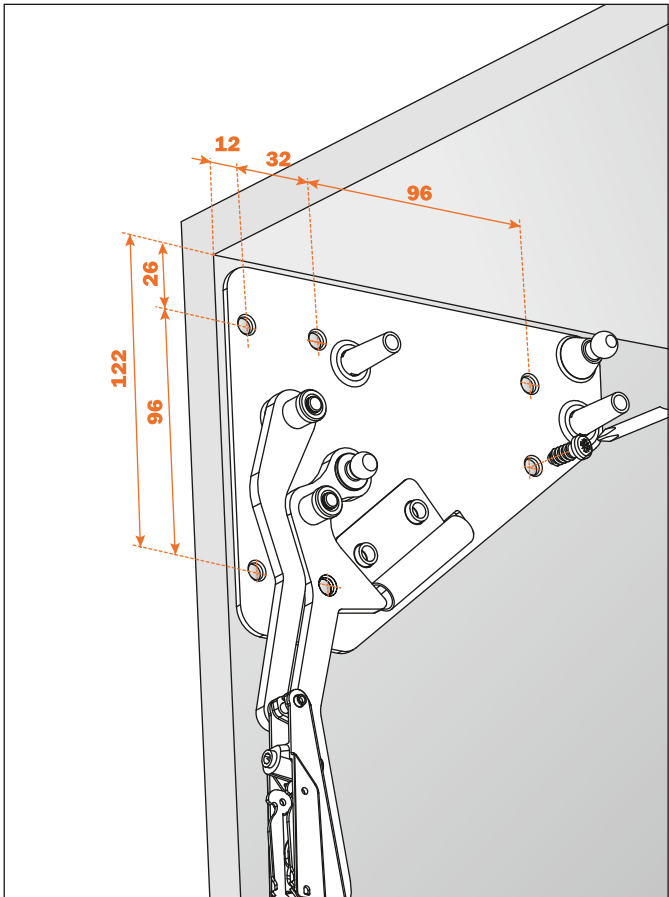


Deploying the piston



Carefully press each end of the piston securely onto the pins on
the bracket and lifting arm, ensuring that the body of the piston
is uppermost.

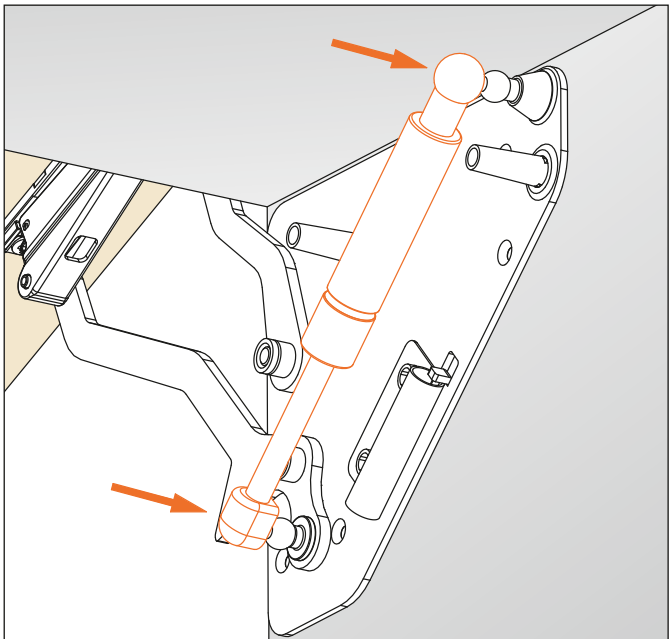


Installing the Smove

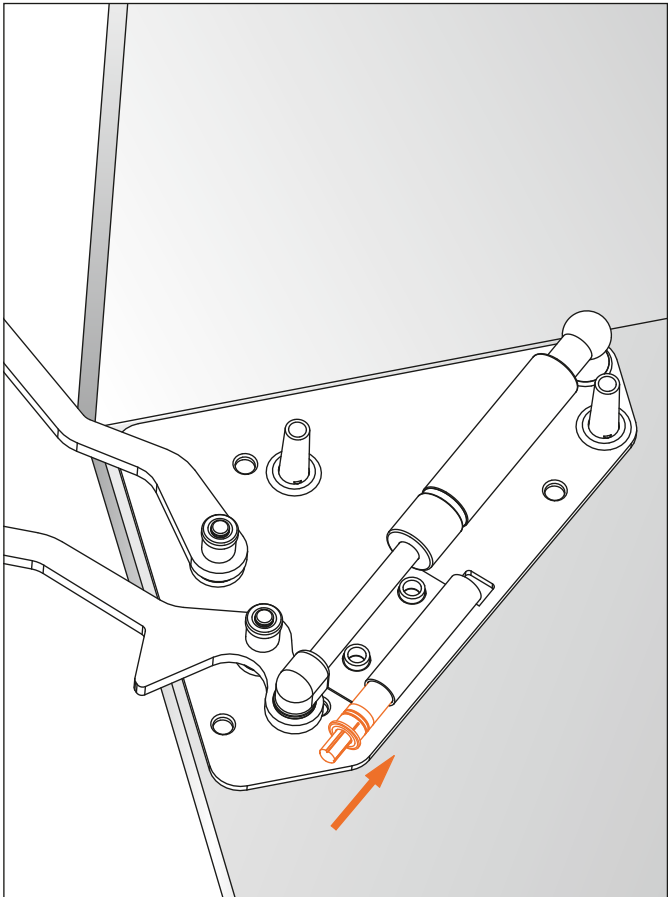


Drilling pattern for wooden door and alu-framed door

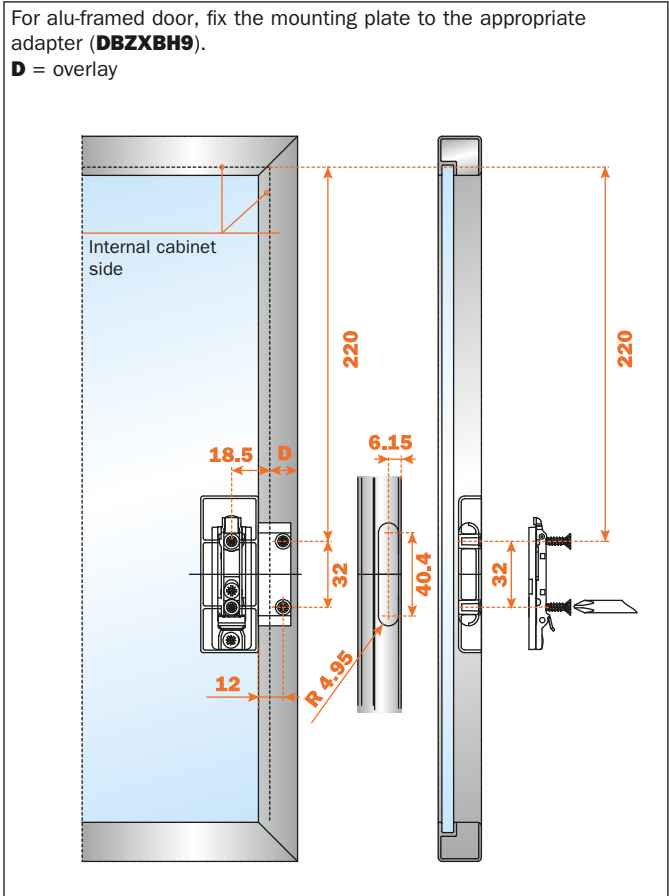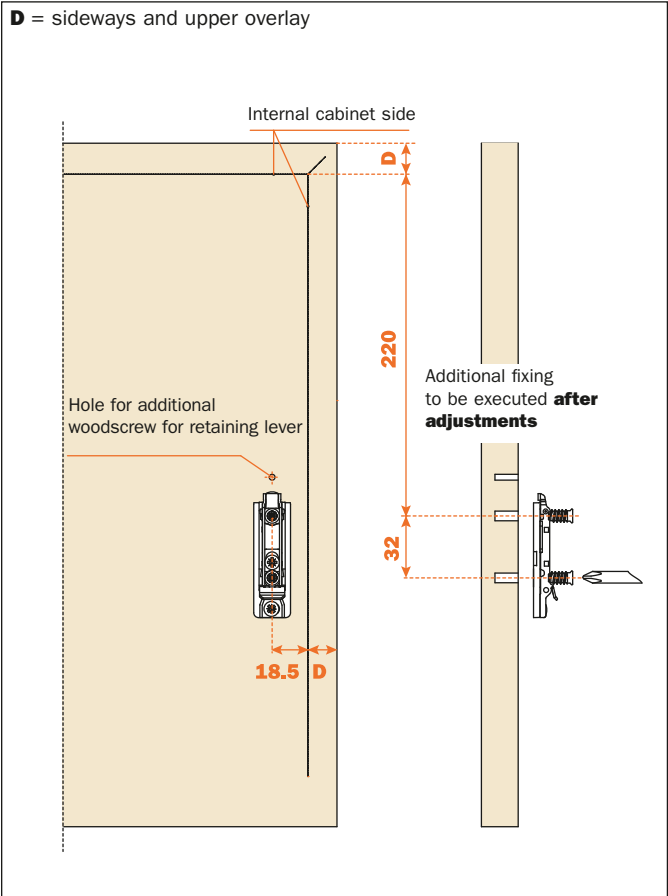


Fitting the door to the cabinet

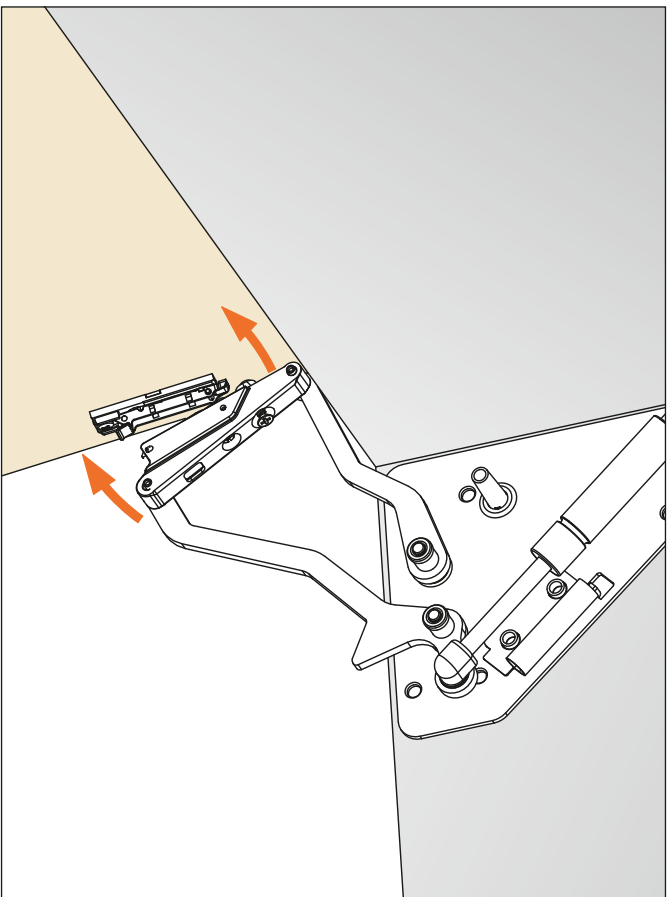

Installing the cover

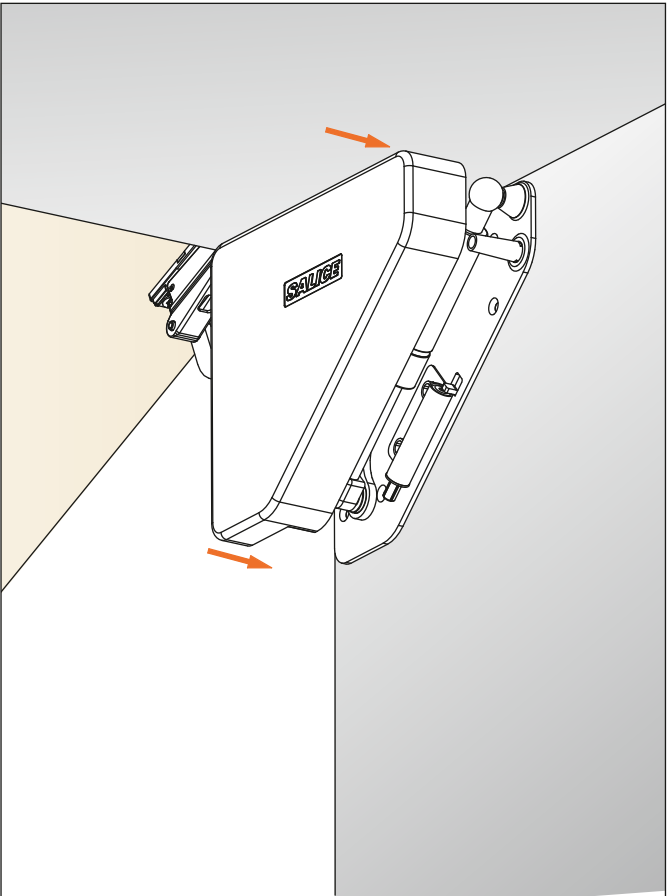


Adjustments and additional fixing

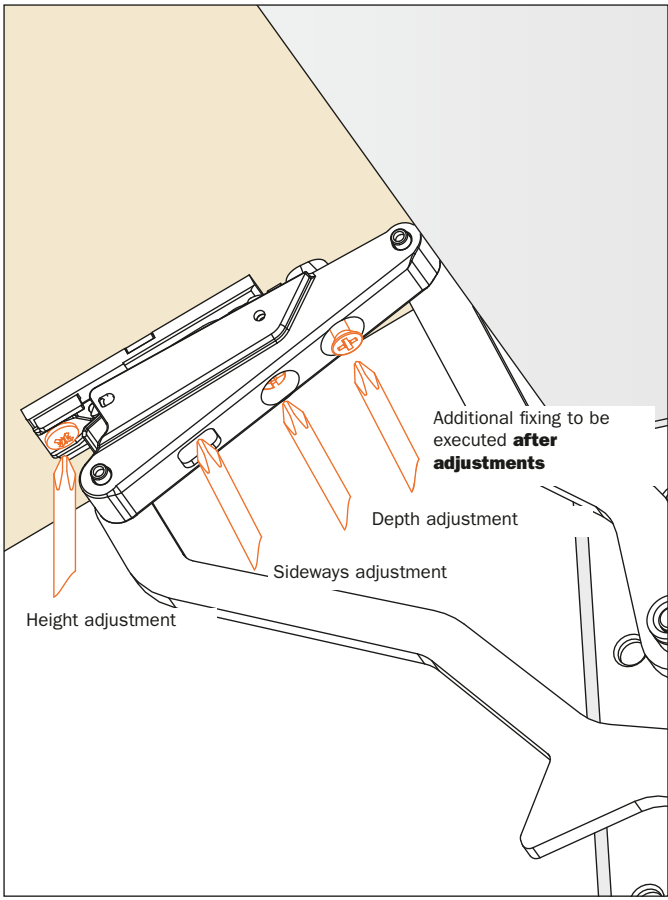


Disassembly

- 1) Loosen the additional wood screw
- 2) then press firmly on the mounting plate lever
- 3) push the door

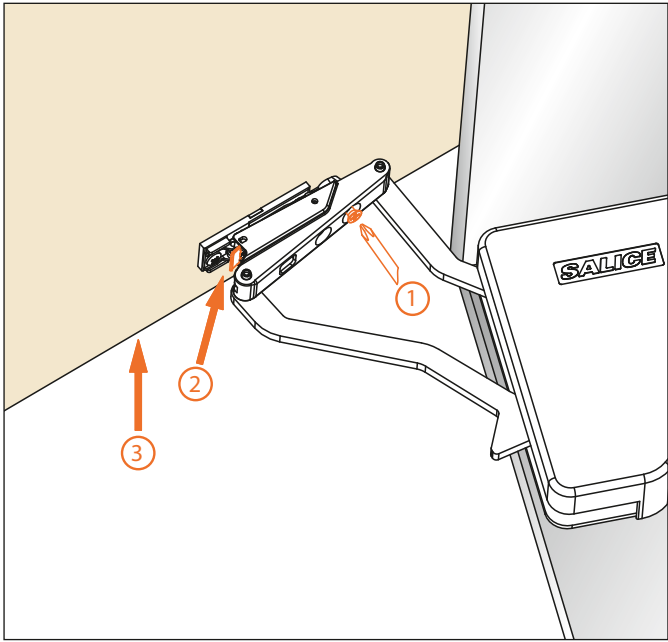

Dimensions of the system

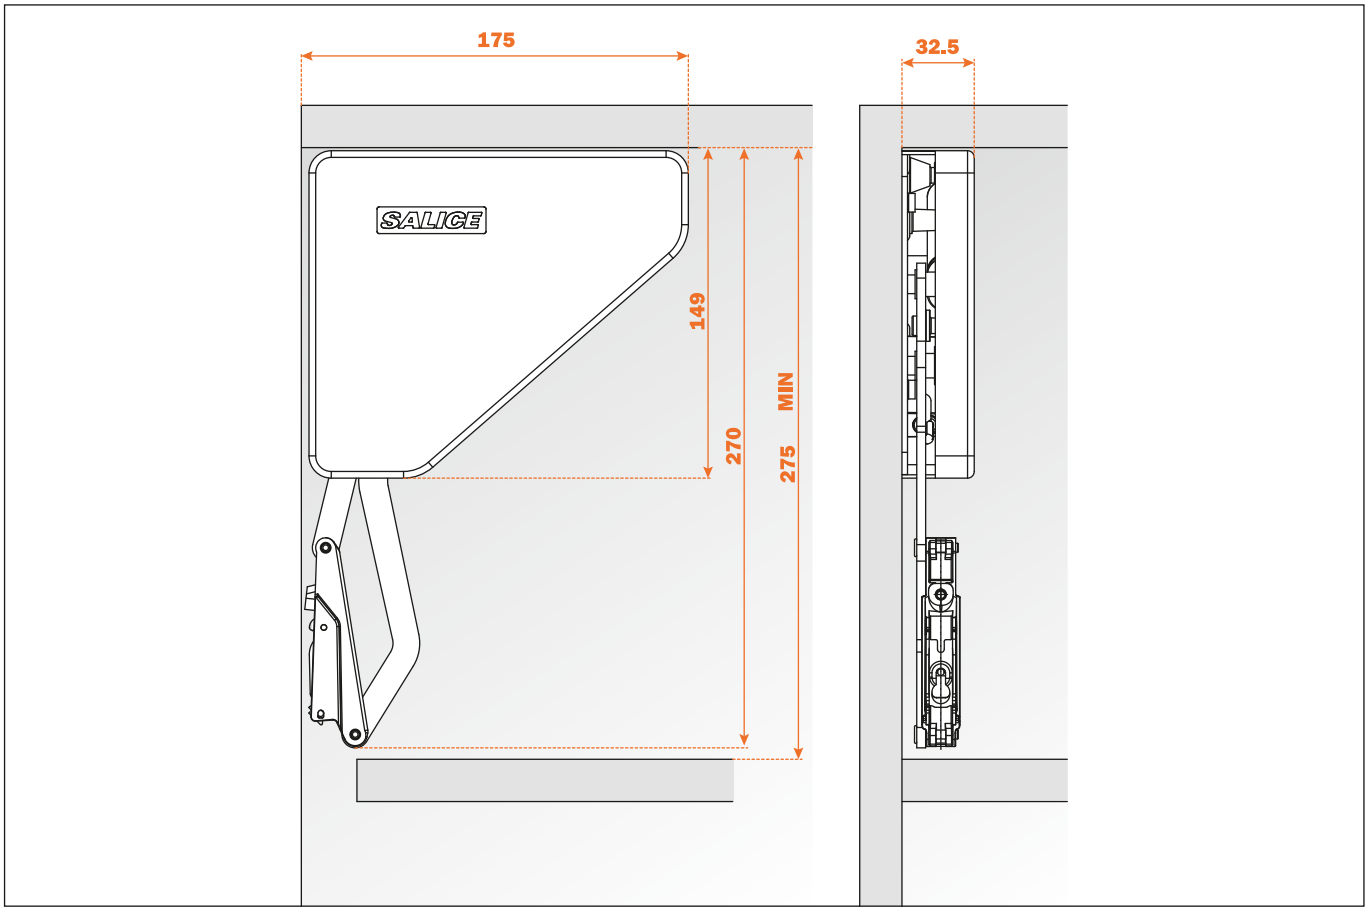

Assembly scheme for cabinets over 1200 mm width



Dimensions of the open door



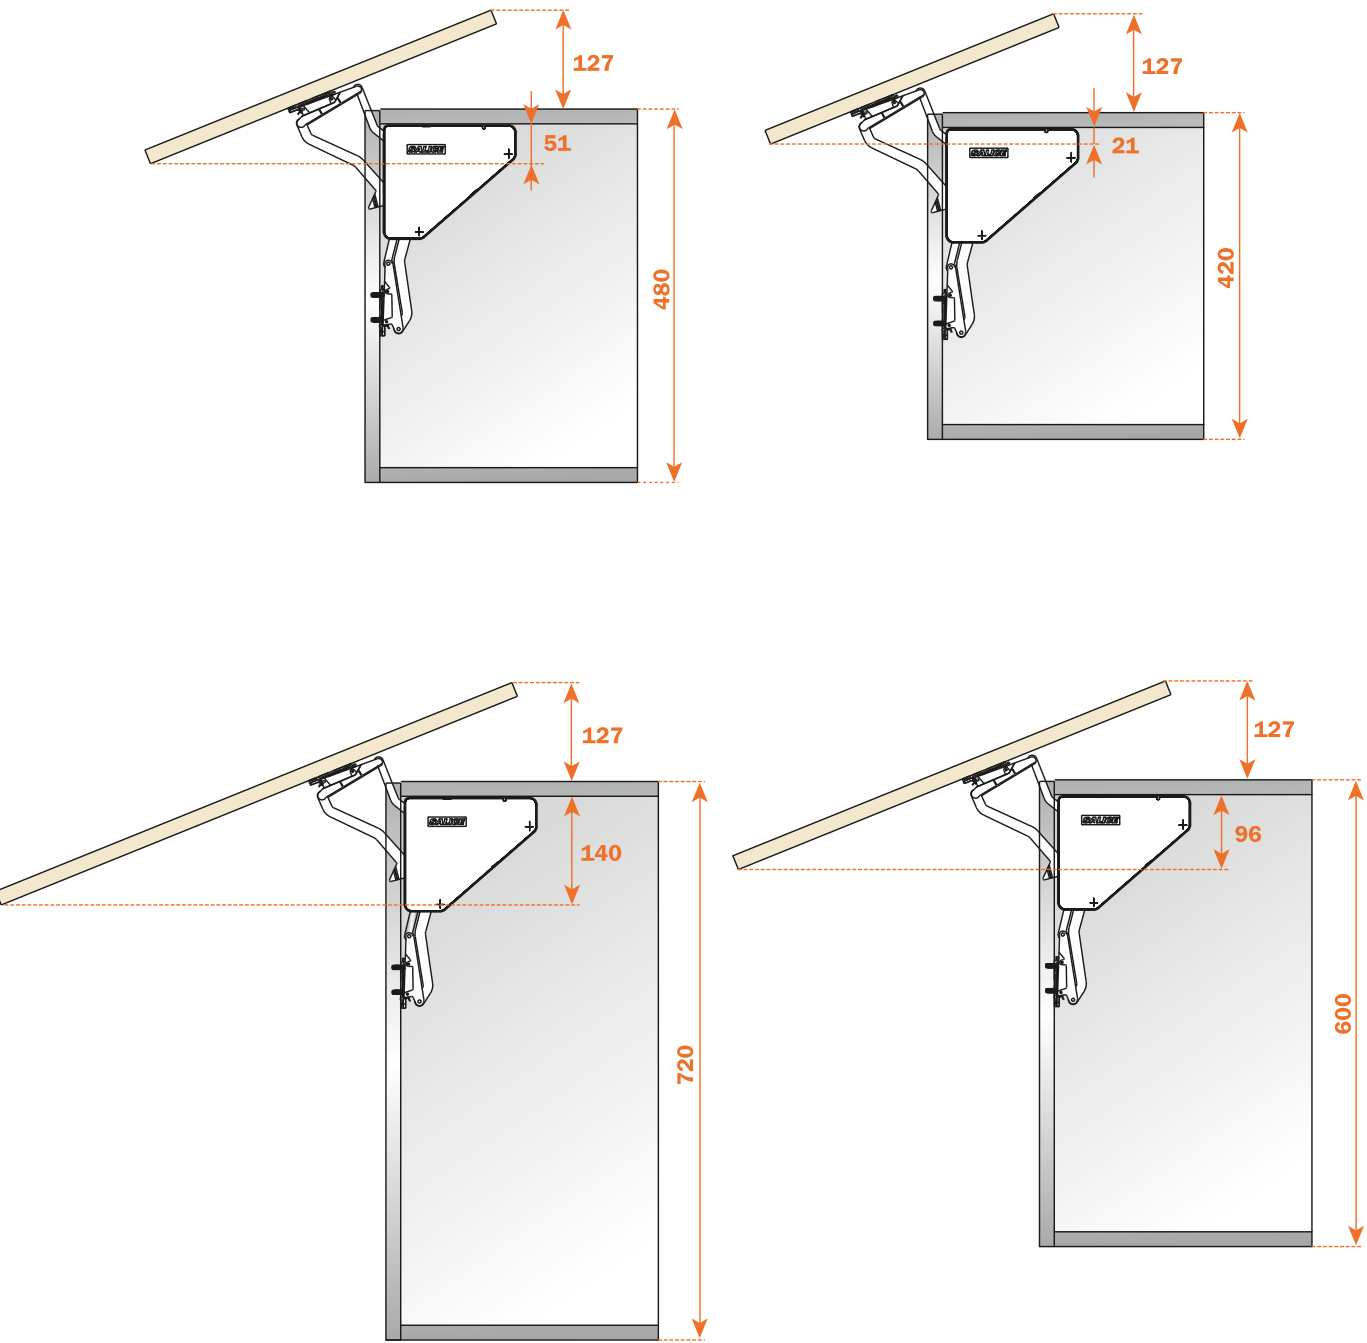


Chart for FLMGSExxx pistons with single-operation door openin


Chart to define the exact strength of the pistons to be used in relationship with the dimensions and weight of the doors.

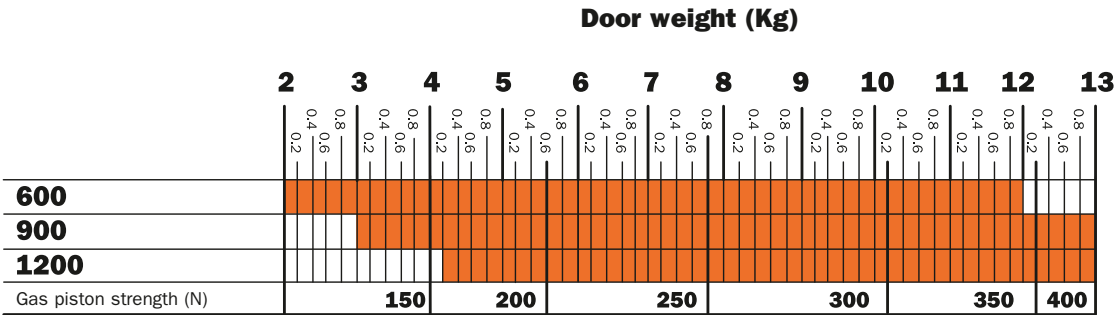


Door height 360 mm

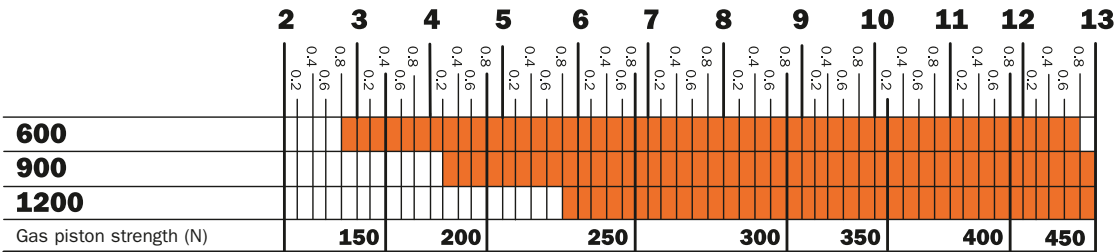


Door height 480 mm

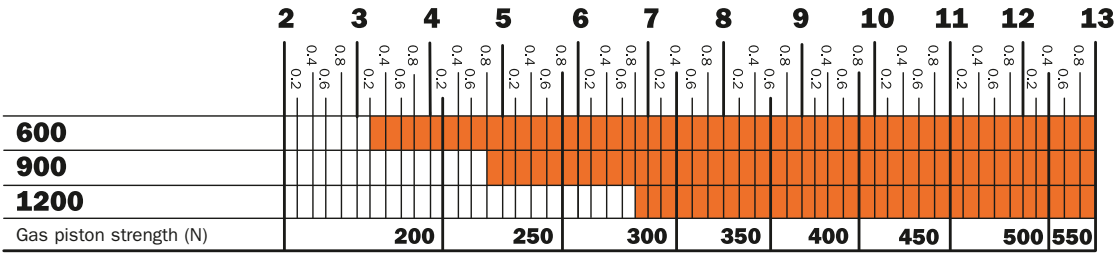

Door height 600 mm

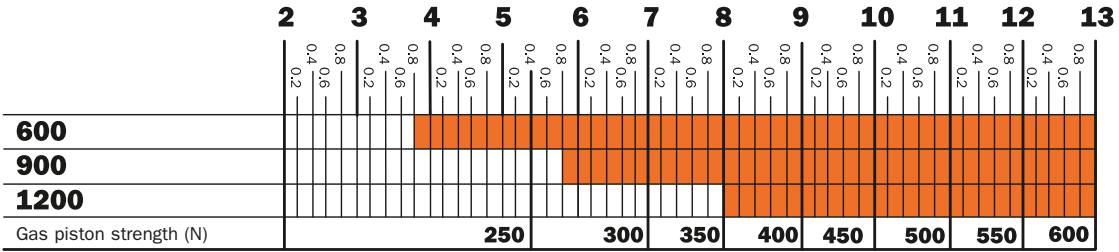

Door height 660 mm

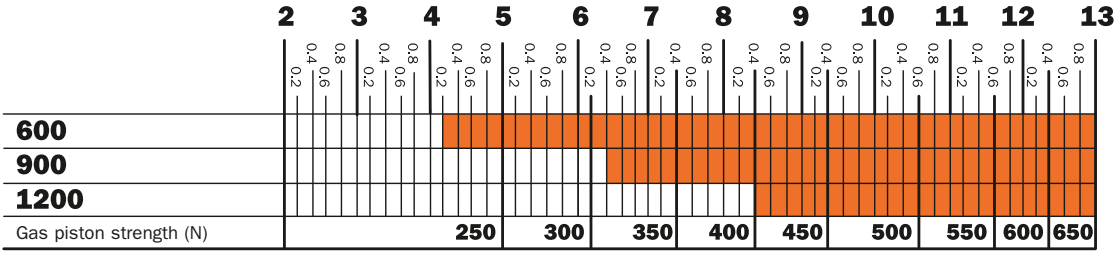

Door height 720 mm

Chart for FLMGRExxx pistons with progressive-operation door opening

Chart to define the exact strength of the pistons to be used in relationship with the dimensions and weight of the doors.

Cabinet width 600, 900 and 1200 mm

