## D0S_SNG - Smoveholder

We suggest that one Smoveholder only is used for each door, by selecting one of the three available models:

**D0S7SNG**
to be used with **doors made with particularly light materials.**

**D0S8SNG**
to be used with **doors with two hinges**.

**D0S9SNG**
to be used with **doors with more than two hinges**.

**Packing**
Boxes 300 pcs
Pallets 7.200 pcs

## Adapter for hinges with arm 0

Adapter to be used ONLY with cruciform mounting plates 37x 32 mm.
For use with mounting plates to be fixed with wood screw, please use a screw with screwhead ø 8 mm and length 16 mm.
It is suggested the use of the article V234X164.

**D2VX09** - for steel mounting plates
**DARX09** - for die-cast mounting plates

**Packing**
Boxes 300 pcs
Pallets 7.200 pcs

## Adapter for hinges with arm 5

Adapter to be used ONLY with cruciform mounting plates 37x 32 mm.
For use with mounting plates to be fixed with wood screw, please use a screw with screwhead ø 8 mm and length 16 mm.
It is suggested the use of the article V234X164.

**D2VX59** - for steel mounting plates
**DARX59** - for die-cast mounting plates

**Packing**
Boxes 300 pcs
Pallets 7.200 pcs

## Adapter for hinges with arm 9

Adapter to be used ONLY with cruciform mounting plates 37x 32 mm.
For use with mounting plates to be fixed with wood screw, please use a screw with screwhead ø 8 mm and length 16 mm.
It is suggested the use of the article V234X164.

**D2VX99** - for steel mounting plates
**DARX99** - for die-cast mounting plates

**Packing**
Boxes 300 pcs
Pallets 7.200 pcs

## Adapter for hinges with arm 17

Adapter to be used ONLY with cruciform mounting plates 37x 32 mm.
For use with mounting plates to be fixed with wood screw, please use a screw with screwhead ø 8 mm and length 16 mm.
It is suggested the use of the article V234X164.

**D2VXP9** - for steel mounting plates
**DARXP9** - for die-cast mounting plates

**Packing**
Boxes 150 pcs
Pallets 3.600 pcs

Smove works by bearing against the flange of the hinge cup and for this reason it is necessary to choose the appropriate adapter.
By reducing the door overlay, it is necessary consequently to increase the height of the adapter.
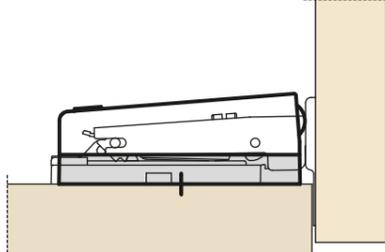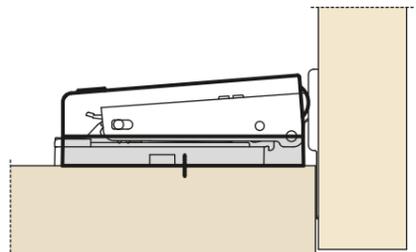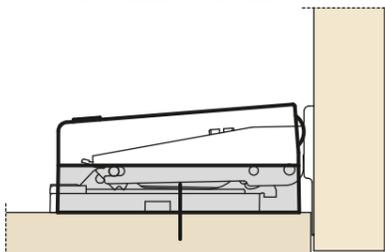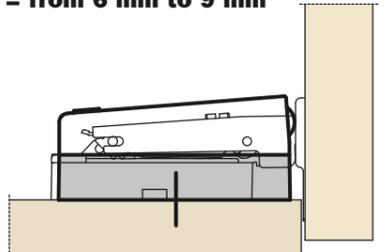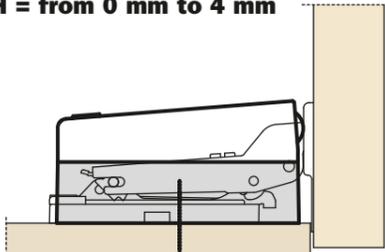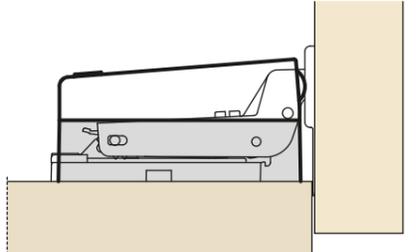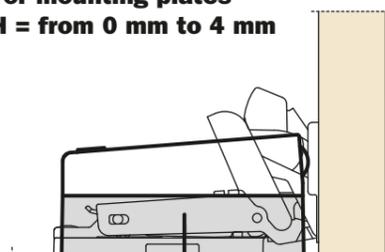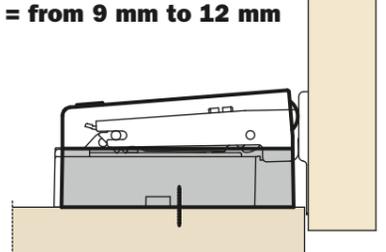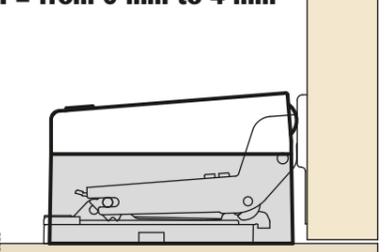
| | FOR HINGES SERIES 100, 200, 800 AND 900 | FOR HINGES SERIES 400 AND 600 | FOR HINGES SERIES F | FOR HINGES SERIES B | The required overlay can be achieved not only by using the appropriate hinge arm, but also by using mounting plates of different heights. Application examples: |
|---|---|---|---|---|---|
| **ADAPTER HEIGHT = 0** | For mounting plates H = from 0 mm to 4 mm | For mounting plates H = from 0 mm to 6 mm | For mounting plates H = from 0 mm to 3 mm | | |
| **ADAPTER HEIGHT = 5** | For mounting plates H = from 0 mm to 4 mm | | | | Arm 0 For mounting plates H = from 6 mm to 9 mm |
| **ADAPTER HEIGHT = 9** | For mounting plates H = from 0 mm to 4 mm | For mounting plates H = from 0 mm to 6 mm | For mounting plates H = from 0 mm to 3 mm | For mounting plates H = from 0 mm to 4 mm | Arm 0 For mounting plates H = from 9 mm to 12 mm |
| **ADAPTER HEIGHT = 17** | For mounting plates H = from 0 mm to 4 mm | For mounting plates H = from 0 mm to 6 mm | For mounting plates H = 0 mm | | Arm 0 For mounting plates H = 18 mm |