


TS.11204

Surface Slide Arm Closer

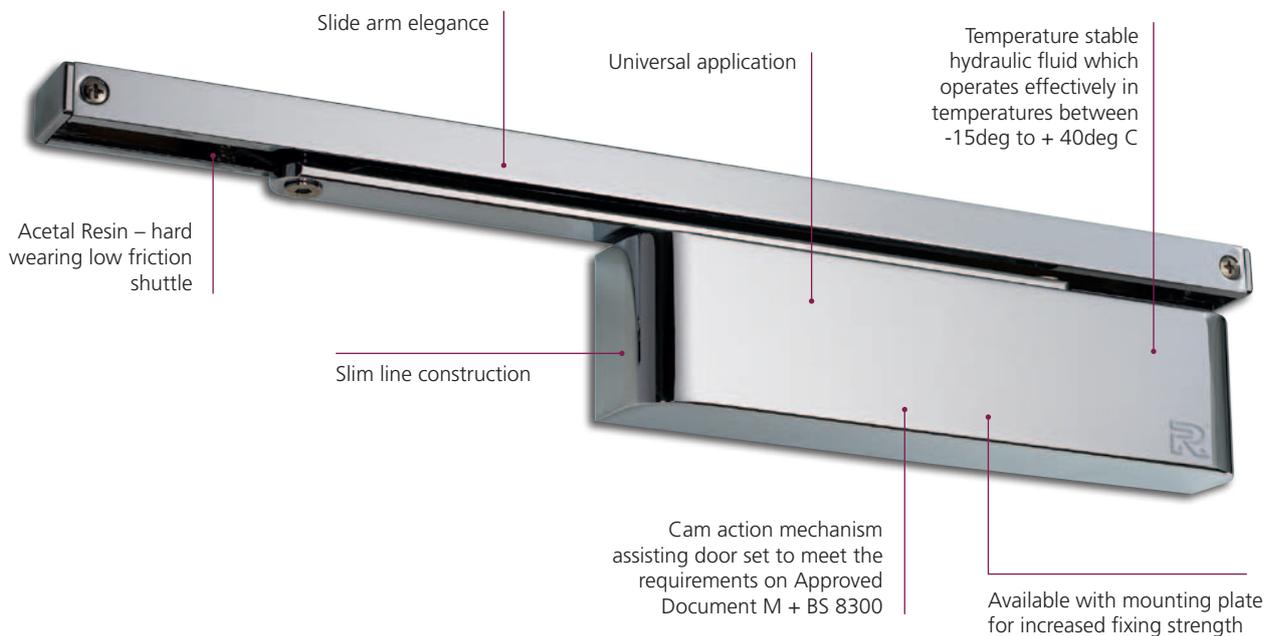

Product Overview

The Cam Action Door Closers, with their renown high efficiency and ease of opening, are what specifiers have come to learn and expect from Rutland door closers. Cam Actions have been used for decades in many and varied applications globally where the characteristics of the Cam, breed the performance, quality, reliability and design associated with Rutland.

Specification Overview



Fire Tested
up to 60 mins



Max Door Weight
up to 80kg



Opening Angle
120°



Max Door Width
1100mm



Universal
Application



Adjustable
Closing Speed



Power Size
EN2-4



Adjustable
Latch Speed



Guarantee



11204CPR01.07.13



Min Door
835mm fig1
728mm fig66



Rut Lock

Technical Information

BS EN 1154 Classification


TS.11204 door closers have been independently tested to conform with the EN 1154 performance standard. They are CE marked and classified as follows:

3 8 3 1 1 3

BS EN 1634 Fire Test

TS.11204 closers have been tested to EN 1634 Test certificates are available on request.

Efficiency Graphs

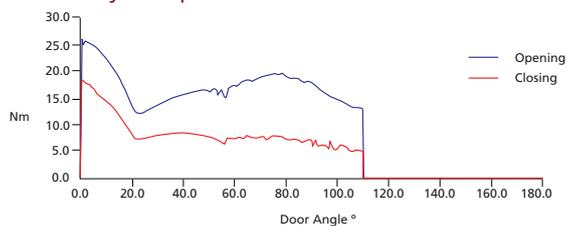

Options

- Mechanical hold open slide rail
- EN2 & EN4
- Back check available as a cushion stop in the rail



All dimensions shown are in mm.

