

1 - Loosen one of the two fixing screws of the mounting plate.






2 - Insert the adapter for the Smoveholder.

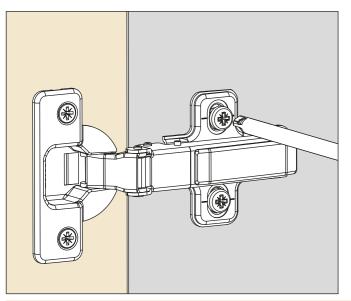

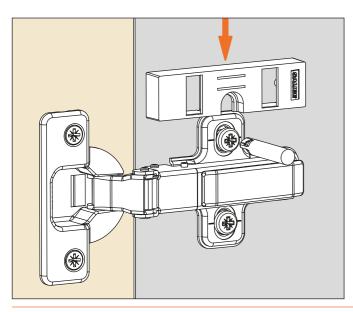


3 - Retighten the fixing screw of the mounting plate.






4 - Apply the Smoveholder to the adapter, as indicated.





5 - Finally it is possible to adjust the Smove to increase or reduce the decelerating effect.

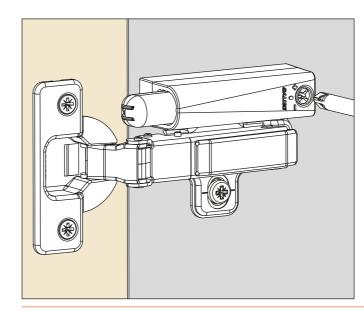



Positive adjustment

Rotating the screw towards the + sign, thus moving the Smove forward, the decelerating effect increases.



Negative adjustment

Rotating the screw towards the - sign, thus moving the Smove backwards, the decelerating effect reduces.



256 | SALICE | 257